



**Bring The
Future Forward**
Enjoy Myself On My Zone

2019
SINCE 1992

Zhejiang Kingdom Plastics Industry Co., Ltd

No. 38 Desheng Road, Heshan Town,
Tongxiang City, Jiaxing City, Zhejiang
Province, 314512, China

Tel: 86-573-89383298 Fax: 86-573-89383289
E-mail: Sales@kingdomflooring.com.cn




www.kingdomflooring.com.cn



Kingdomfloor Paves The Future Of The World **With You**

Enjoy Myself On My Zone

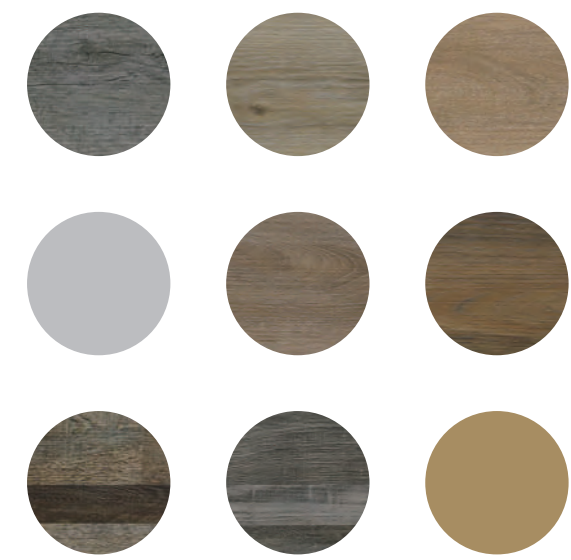

Change the
floorcovering to meet
your personality

Make full use of the
ground and make the space
as you desire

A desired
catalogue here to meet
your imagination

▲ NIK9321





BEAUTIFY THE WORLD WITH STYLE



ABOUT US

Beautify The World With Style

At present, Kingdomfloor is ranked as one of the leaders in vinyl flooring in China both in terms of production capacity and in terms of product quality.

INDUSTRY LEADER

Kingdomfloor has been involved in the manufacturing and exporting vinyl flooring since 1992. With its technically advanced production equipment, professional technical staffs and experienced sales team, Kingdomfloor has maintained its position at the forefront of the vinyl flooring business.

POWERFUL

Kingdomfloor has to date invested a large amount in its production facility, covering a land-area of about 120,000 square meters and 8 LVT production lines, 15 SPC production lines, 6 WPC production lines. The annual production capacity reaches 45 million square meters.



BEST SUPPLIER

Kingdomfloor has both normal series for residential use and luxury series for commercial use. With authentic looks of wood planks and stone tiles, Kingdomfloor makes each individual tile and plank as a piece of art with emotion of life. Till now, Kingdomfloor has exported to more than 30 countries such as USA, Canada, Germany, UK, Austria, etc. and has a proven reputation.

Kingdomfloor is willing to be your potential and best supplier, and will be very appreciative to receive any inquiries from you. The motto of Kingdomfloor is "Beautify the world with style!"





**Kingdomfloor
Paves The Future Of The
World With You**





Leave The Forest To The Nature & Let The Human Enjoy The Green World

—

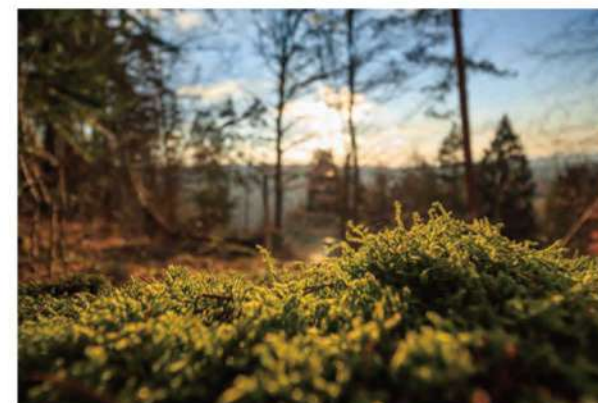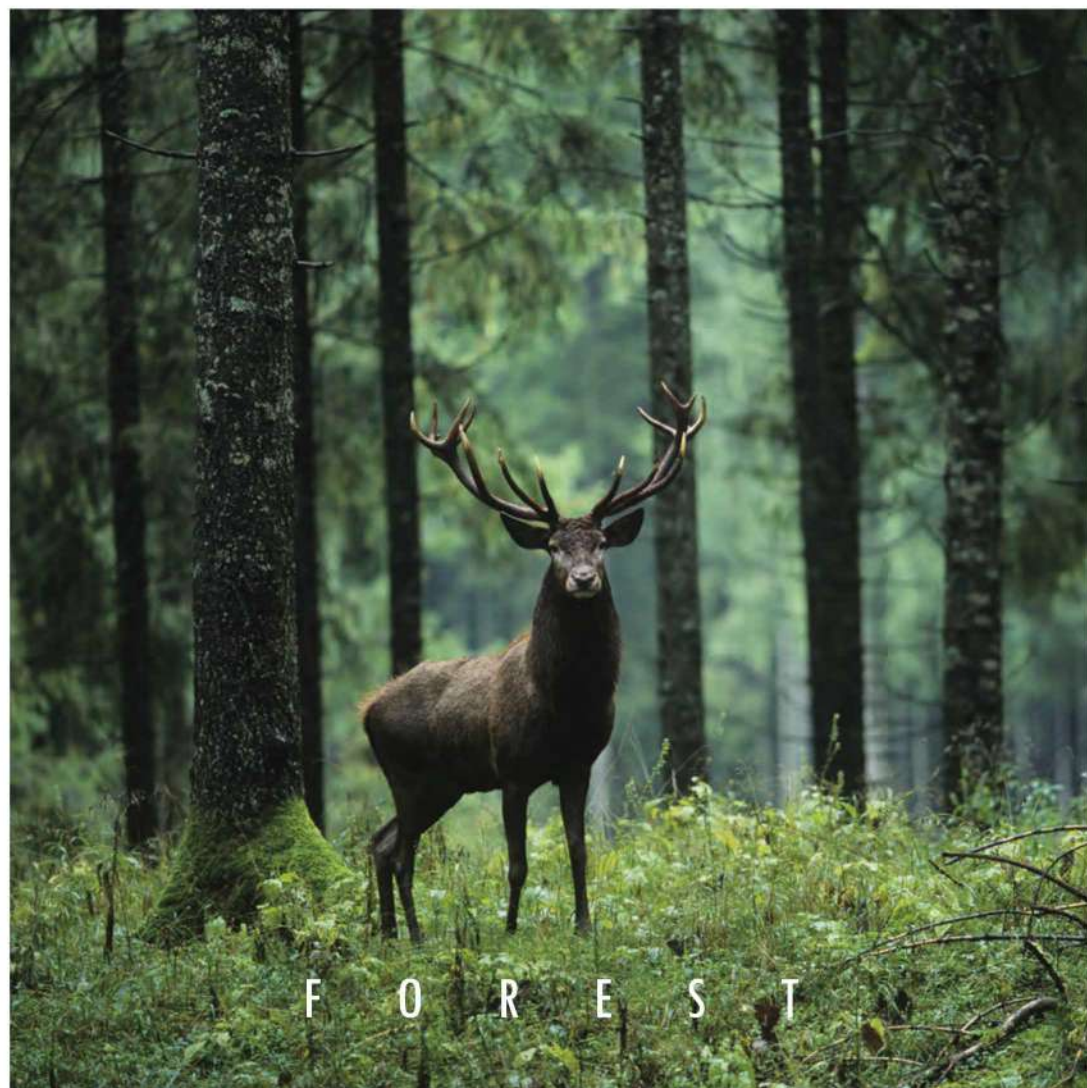

WE CHERISH MORE TO THE ENVIRONMENT



We insists to our enterprise mission of leaving the forest to the nature and let the human enjoy the green world, no forest destroy, no environment pollution while to offer the world with healthier, more environmental friendly floor coverings.


WE TAKE GLOBAL CERTIFICATES AS DUTIES

LVT, WPC, SPC and ESPC product from Kingdom-floor has already got many certificates such as Floorscore, ASTM,TUV and CE. All the raw materials we used in production processes and its effect to the environment are open to all.

WE CONCERN MORE WITH YOUR HEALTH

As for the safety of the floor covering, from the raw material to the production process, be rest assured that Kingdomfloors will never add any harmful ingredient to ensure the safety of the floor piece.



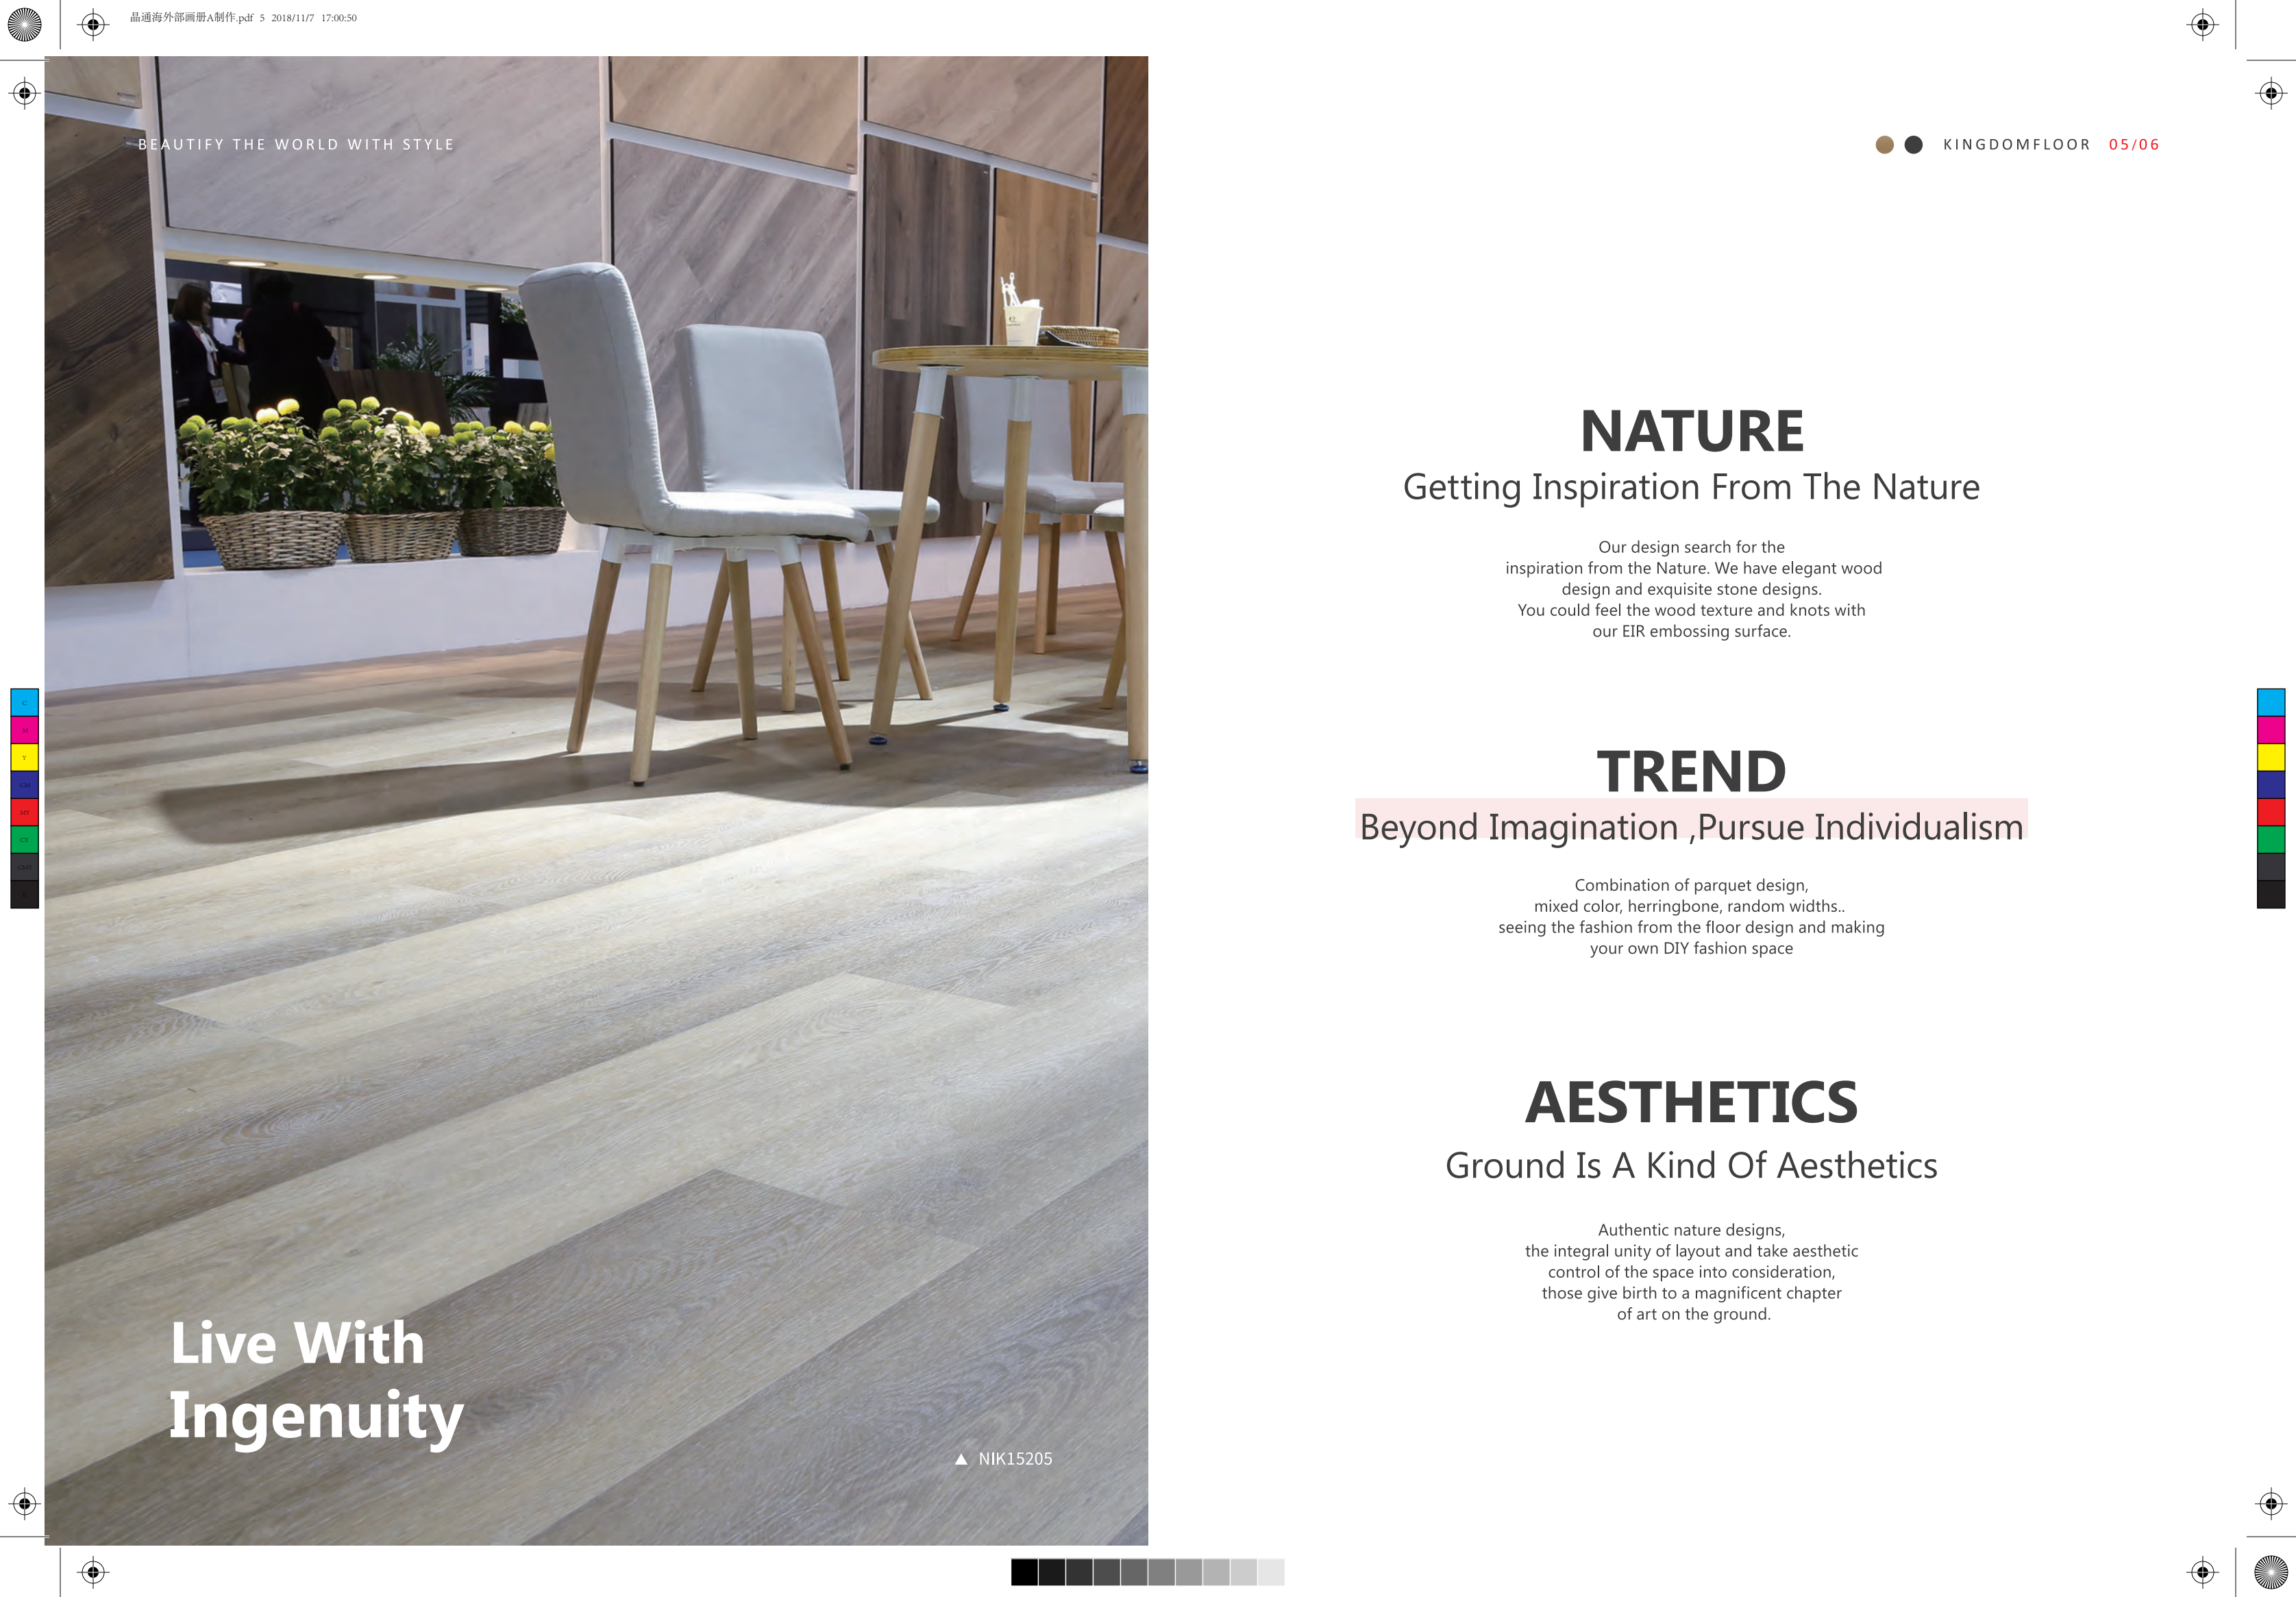

BEAUTIFY THE WORLD WITH STYLE

Live With
Ingenuity

▲ NIK15205

NATURE

Getting Inspiration From The Nature

Our design search for the inspiration from the Nature. We have elegant wood design and exquisite stone designs. You could feel the wood texture and knots with our EIR embossing surface.

TREND

Beyond Imagination ,Pursue Individualism

Combination of parquet design, mixed color, herringbone, random widths.. seeing the fashion from the floor design and making your own DIY fashion space

AESTHETICS

Ground Is A Kind Of Aesthetics

Authentic nature designs, the integral unity of layout and take aesthetic control of the space into consideration, those give birth to a magnificent chapter of art on the ground.





BEAUTIFY THE WORLD WITH STYLE

KINGDOMFLOOR 07/08

Brand New Ingenious Floor Designs

Enjoy Your Floor World

▲ NIK3233




TECHNICAL DATA

Thickness		2.0-5.5mm
Density		1.8~2.02g/cm3
Wearlayer		0.3/0.5/0.7mm
Dimensional stability	ISO23999:2008	X Direction: 0.12% Y Direction: 0.10%
Curling	ISO23999:2008	≤0.2mm
Residual indentation	ISO 24343-1:2007	~0.04mm
Light stability	ISO105-B02:Method 3	≥6
Castor chair	EN 425	Typ W
Classification	EN ISO 10582	23,31/33, 42/34,43
Reaction to fire	EN 13501-1	Bfl-S1
Slip resistance	DIN 51130 EN 13893	R10 DS
Wear resistance	EN 660-2	Group T
Thermal resistance	EN 12667:2001	0.074m²K/W
Determination of resistance to stains chemical rsistance	ISO26987:2008	Resistant
Squareness	ISO24342:2007	Deviation range: X Direction: 0.00mm~+0.05mm Y Direction:0.00mm~+0.05mm
Straightness	ISO24342:2007	Deviation range: X Direction: 0.00mm~+0.03mm Y Direction:0.00mm~+0.05mm
Flexibility	ISO 24344:2008 Method A	There was no cracking shown in both directions when tested with a 20mm mandreal
Peel resistance	ISO 24345:2006	X Direction: 65N/50mm Y Direction: 65N/50mm
Burning cigarette test	EN1399:1997 Method B	Rating 3: Moderate change of gloss and moderate brown stain
Utilization	Recyclable	

MOST POPULAR-SPC

SPC is a particularly new product in the flooring industry. It not only gathers most of the current flooring material, but also provides better performance of being water-proof, rigid, dimensionally stable, and relatively environmentally friendly.Thus it can be safely used in areas with sustained exposure to moisture, such as bathroom, laundry room and kitchen. With good rigidity, SPC provides a quieter, warmer vinyl flooring with a cushioned backing attached, thus eliminating the imperfections from the subfloor which is normally transferred through LVT. SPC is available with locking system.

Rigid vinyl structure

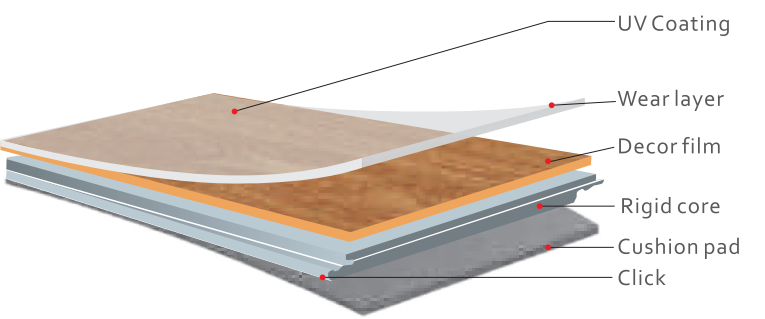

SPC - PLANK



1220mm*180mm



1220mm*229mm



1511mm*229mm



1830mm*228mm

SPC - TILE



610mm*305mm



457mm*457mm



914mm*457mm

TECHNICAL DATA




Thickness	3.2-5.0mm	
Density	1.95~1.97g/cm3	
Wearlayer	0.3/0.5mm	
Dimensional stability	ISO23999:2008	X Direction: 0.08% Y Direction: 0.07%
Curling	ISO23999:2008	≤1.0mm
Residual indentation	ISO 24343-1:2007	~0.01mm
Light stability	ISO105-B02:Method 3	≥6
Castor chair	EN 425	Typ W
Classification	EN ISO 10582	23,31/33, 42
Reaction to fire	EN 13501-1	Bfl-S1
Slip resistance	DIN 51130 EN 13893	R10 DS
Wear resistance	EN 660-2	Group T
Thermal resistance	EN 12667:2001	0.038m²K/W
Determination of resistance to stains chemical rsistance	ISO26987:2008	Resistant
Squareness	ISO24342:2007	Deviation range: X Direction: 0.00mm~+0.05mm Y Direction:0.00mm~+0.05mm
Straightness	ISO24342:2007	Deviation range: X Direction: 0.00mm~+0.03mm Y Direction:0.00mm~+0.05mm
Peel resistance	ISO 24345:2006	X Direction: 65N/50mm Y Direction: 65N/50mm
Burning cigarette test	EN1399:1997 Method B	Rating 3: Moderate change of gloss and moderate brown stain
Utilization	Recyclable	



HIGH-END - WPC

WPC is a collection of Acoustic Vinyl CompositeCore click product, which is a new revolution of LVT. It is a perfect alternative to LVT or laminate flooring. It is an engineered flooring product that consists of a lvt top layer, compositecore and cork backing with click system. With vinyl on top, it provides a durable and resilient performance; Compositecore is an extruded layer which is waterproof with excellent dimensional stability; and cork backing ensures superior sound insulation performance.

Acoustic Vinyl CompositeCore WPC-Click Structure

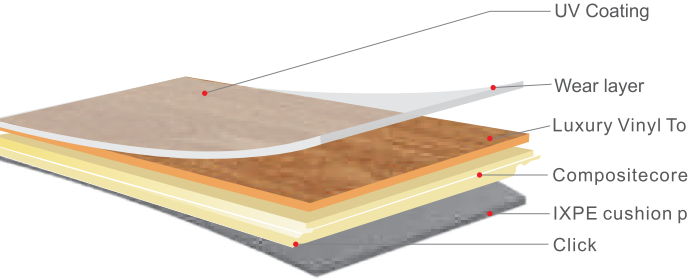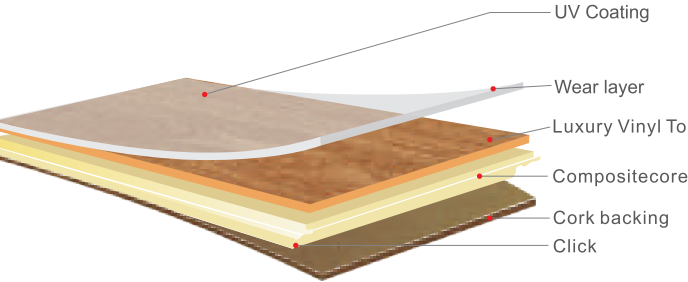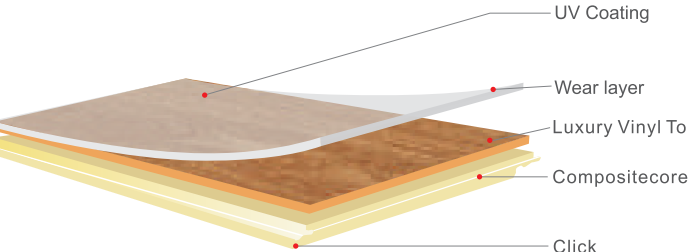

1220mm*150mm



1220mm*180mm



1220mm*229mm



1511mm*229mm




1830mm*228mm



2230mm*228mm

WPC



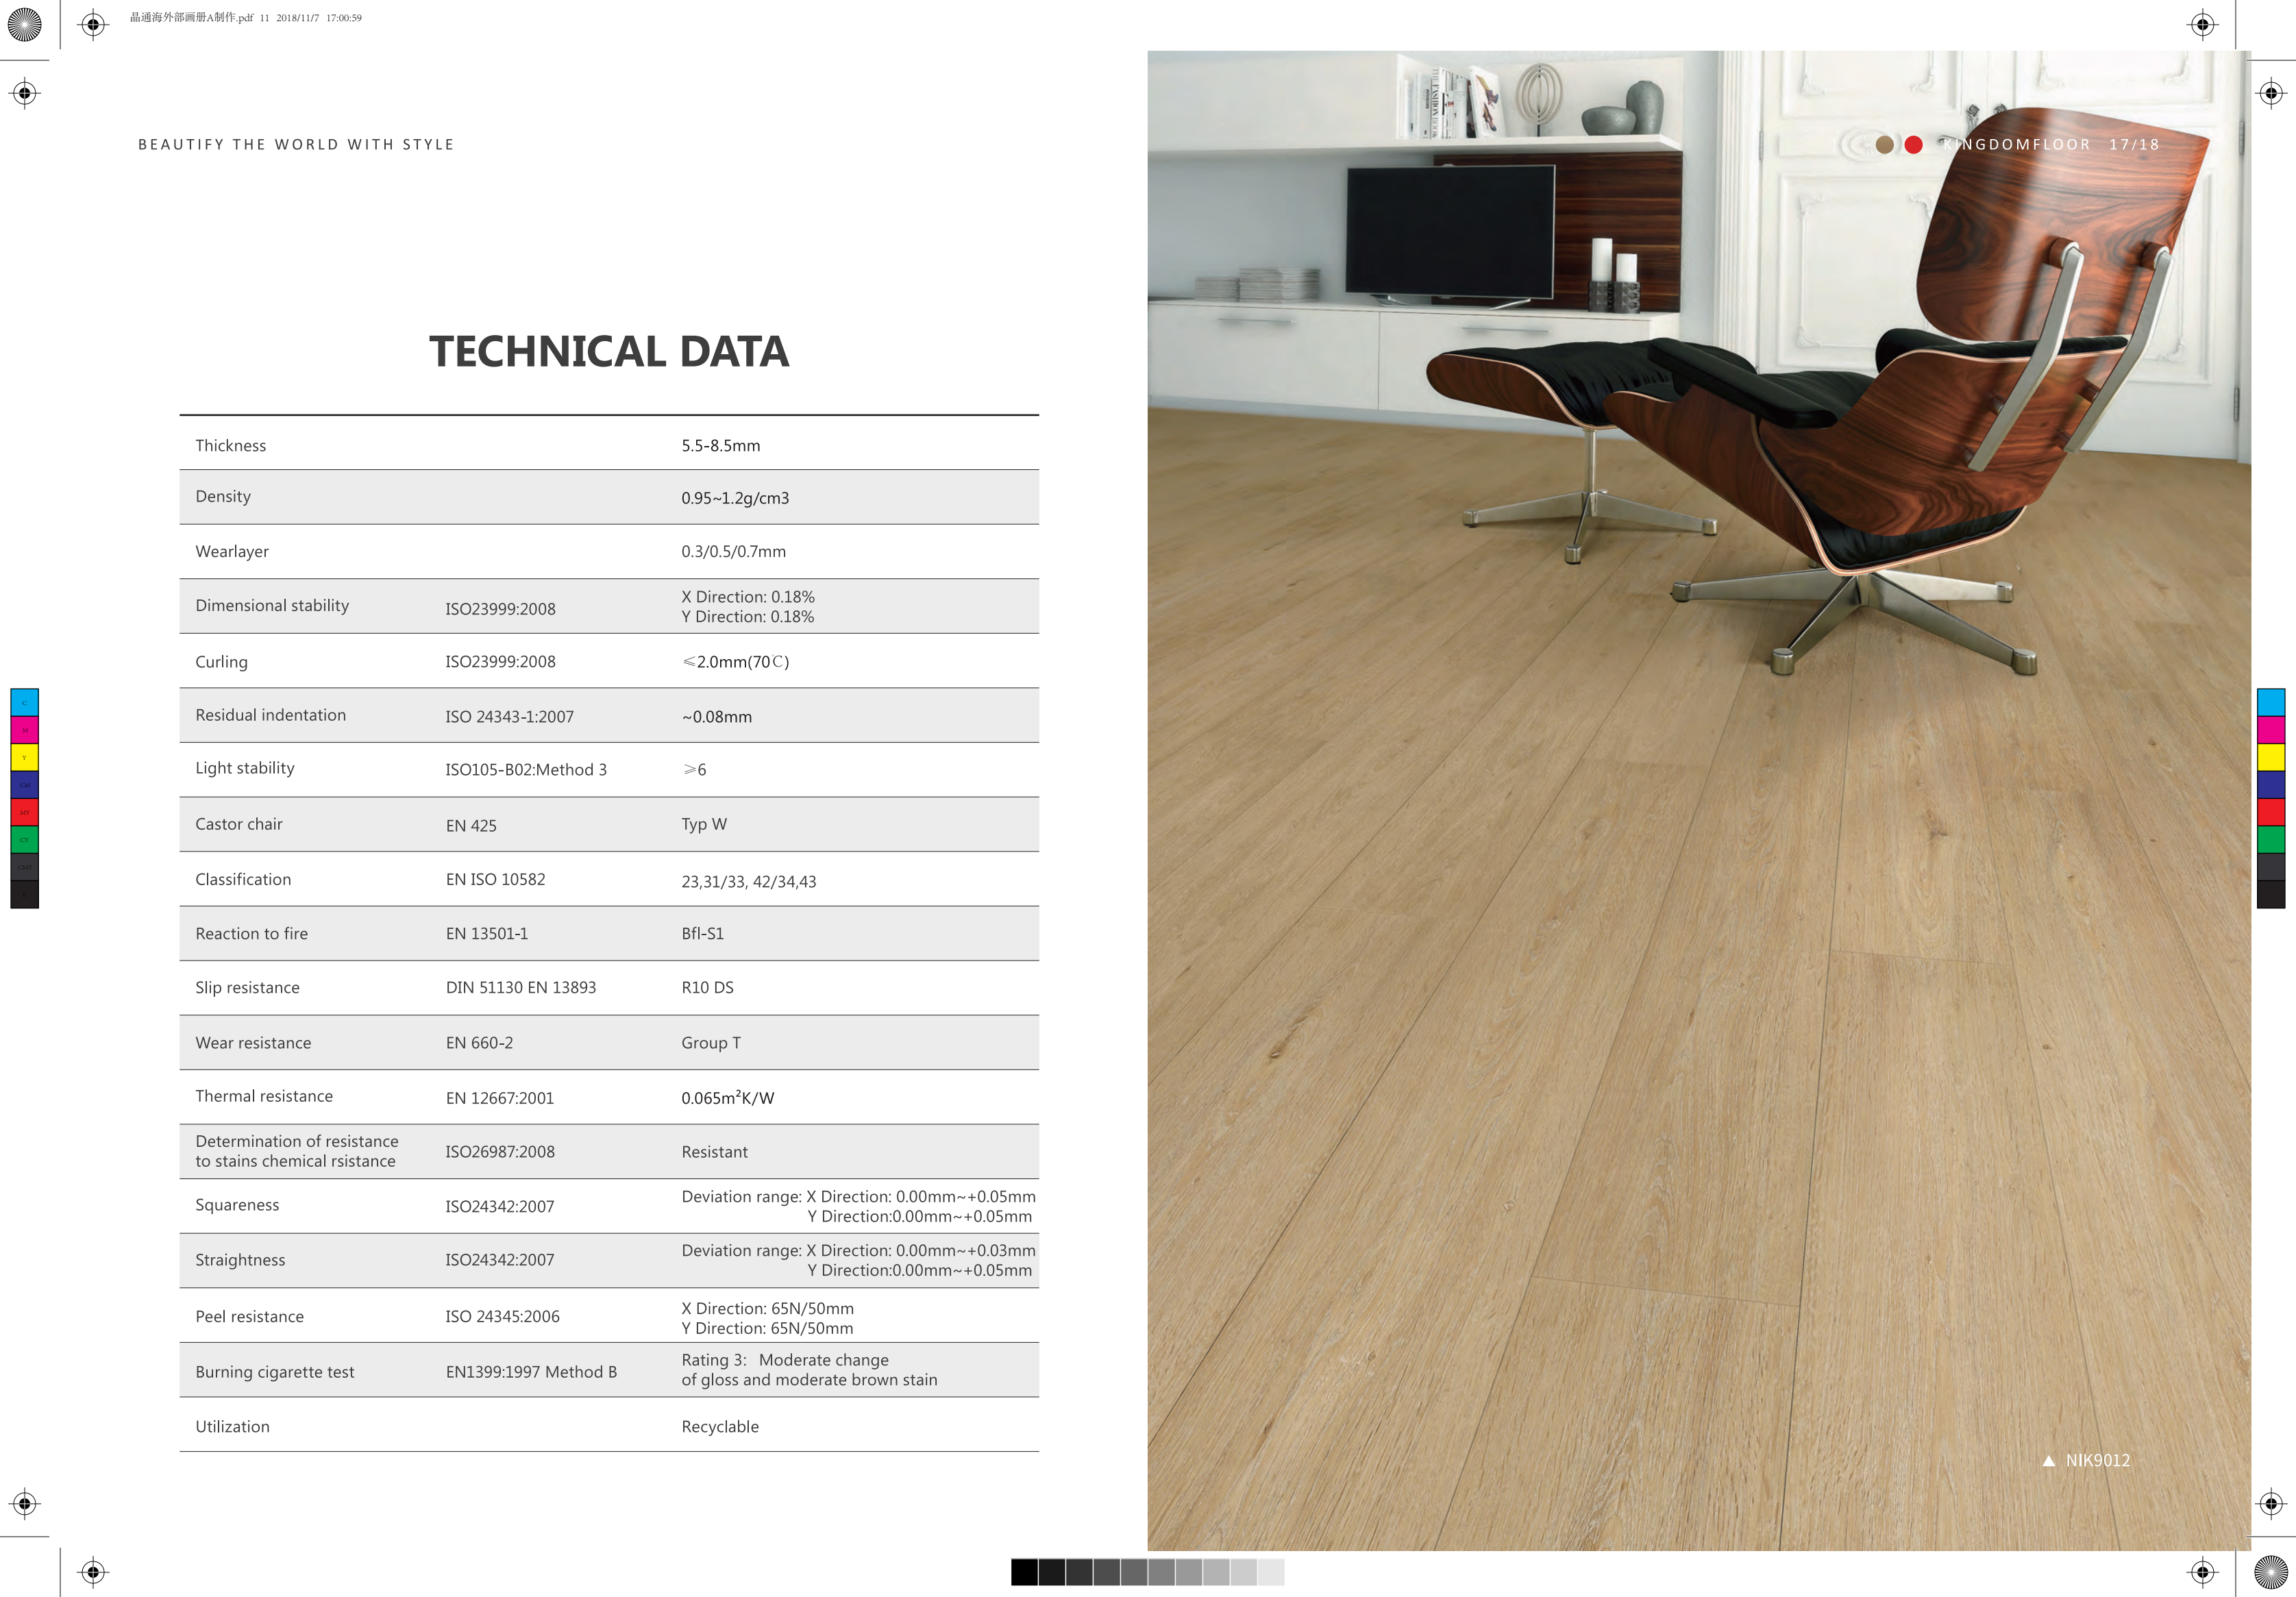

BEAUTIFY THE WORLD WITH STYLE

TECHNICAL DATA

Thickness	5.5-8.5mm	
Density	0.95~1.2g/cm3	
Wearlayer	0.3/0.5/0.7mm	
Dimensional stability	ISO23999:2008	X Direction: 0.18% Y Direction: 0.18%
Curling	ISO23999:2008	≤2.0mm(70℃)
Residual indentation	ISO 24343-1:2007	~0.08mm
Light stability	ISO105-B02:Method 3	≥6
Castor chair	EN 425	Typ W
Classification	EN ISO 10582	23,31/33, 42/34,43
Reaction to fire	EN 13501-1	Bfl-S1
Slip resistance	DIN 51130 EN 13893	R10 DS
Wear resistance	EN 660-2	Group T
Thermal resistance	EN 12667:2001	0.065m²K/W
Determination of resistance to stains chemical rsistance	ISO26987:2008	Resistant
Squareness	ISO24342:2007	Deviation range: X Direction: 0.00mm~+0.05mm Y Direction:0.00mm~+0.05mm
Straightness	ISO24342:2007	Deviation range: X Direction: 0.00mm~+0.03mm Y Direction:0.00mm~+0.05mm
Peel resistance	ISO 24345:2006	X Direction: 65N/50mm Y Direction: 65N/50mm
Burning cigarette test	EN1399:1997 Method B	Rating 3: Moderate change of gloss and moderate brown stain
Utilization	Recyclable	

KINGDOMFLOOR 17/18


▲ NIK9012



NIK15218 ▲



1220mm*180mm



1220mm*229mm



1511mm*229mm



1830mm*228mm




2230mm*228mm

EVOLUTION-ESPC

Engineered Solid Plastic Composite(ESPC) combines advantages of both SPC and LVT, it remains the excellent dimensional stability, being water-proof , rigid of SPC,but also provides softness of LVT.With IXPE cushioned backing, ESPC provides a quieter, warmer vinyl flooring. ESPC is available with locking system and EIR embossing.

Engineered SPC

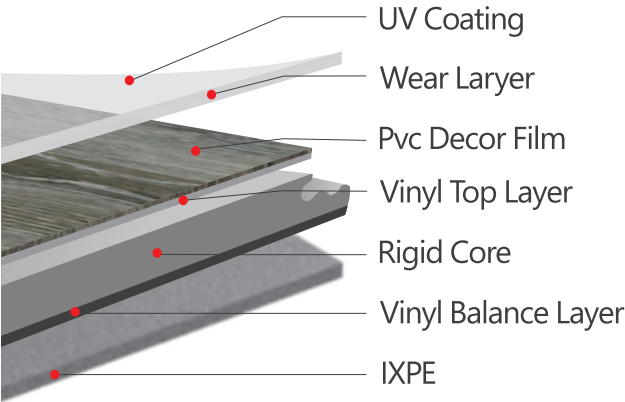

TECHNICAL DATA

Thickness	4.5-7.0mm	
Density	1.88~1.94g/cm3	
Wearlayer	0.3/0.5/0.7mm	
Dimensional stability	ISO23999:2008	X Direction: 0.03% Y Direction: 0.02%
Curling	ISO23999:2008	≤0.5mm
Residual indentation	ISO 24343-1:2007	~0.04mm
Light stability	ISO105-B02:Method 3	≥6
Castor chair	EN 425	Typ W
Classification	EN ISO 10582	23,31/33, 42/34,43
Reaction to fire	EN 13501-1	Bfl-S1
Slip resistance	DIN 51130 EN 13893	R10 DS
Wear resistance	EN 660-2	Group T
Thermal resistance	EN 12667:2001	0.042m²K/W
Determination of resistance to stains chemical rsistance	ISO26987:2008	Resistant
Squareness	ISO24342:2007	Deviation range: X Direction: 0.00mm~+0.05mm Y Direction:0.00mm~+0.05mm
Straightness	ISO24342:2007	Deviation range: X Direction: 0.00mm~+0.03mm Y Direction:0.00mm~+0.05mm
Peel resistance	ISO 24345:2006	X Direction: 65N/50mm Y Direction: 65N/50mm
Burning cigarette test	EN1399:1997 Method B	Rating 3: Moderate change of gloss and moderate brown stain
Utilization	Recyclable	

BEAUTIFY THE WORLD WITH STYLE


KINGDOMFLOOR 21/22

Always One True Inner Voice Waiting For One Design

Enjoy Your Floor World

▲ NIK9321

From simple reproduction of natural designs to redefining ground aesthetics. Kingdomfloor brand new designs of the floor has nearly 100% restored the natural material effect, and integrated into the designer's unique ideas.



EIR COLLECTION

Touch The Reality

KingMax

Pattern Repeat length: 1890mm

EIR collection in particular offers plenty of wood designs available for EIR embossing in 3 different formats.This means any grain or knot can be touched,- making it truly authentic and distinctive.

NIK18206 ▼



NIK18133



NIK18110



NIK18113



NIK18199



NIK18265



NIK1818230



NIK182848



NIK18284



NIK182842



NIK1828410



NIK18149



NIK18218



NIK18275



NIK18281

Eir Collection






BEAUTIFY THE WORLD WITH STYLE

KingMax


Pattern Repeat length: 1890mm



NIK18030




NIK18031




NIK18034




NIK18202 ▲

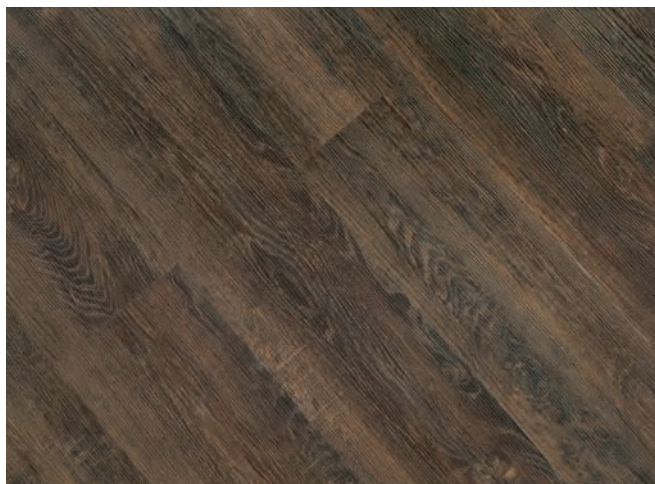

NIK18063

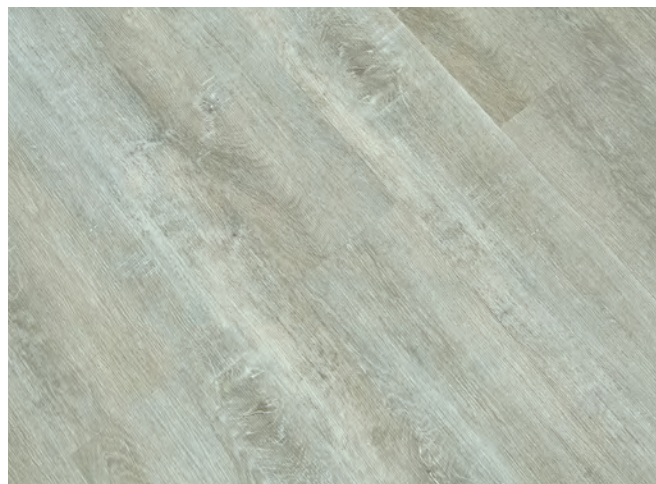

NIK18071

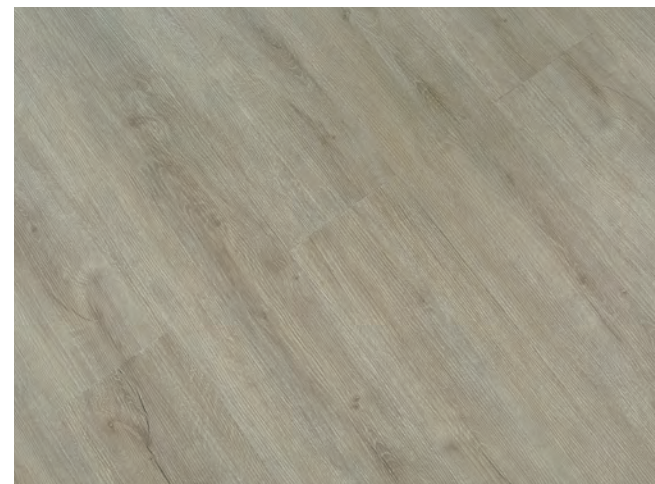


NIK18084



NIK18069



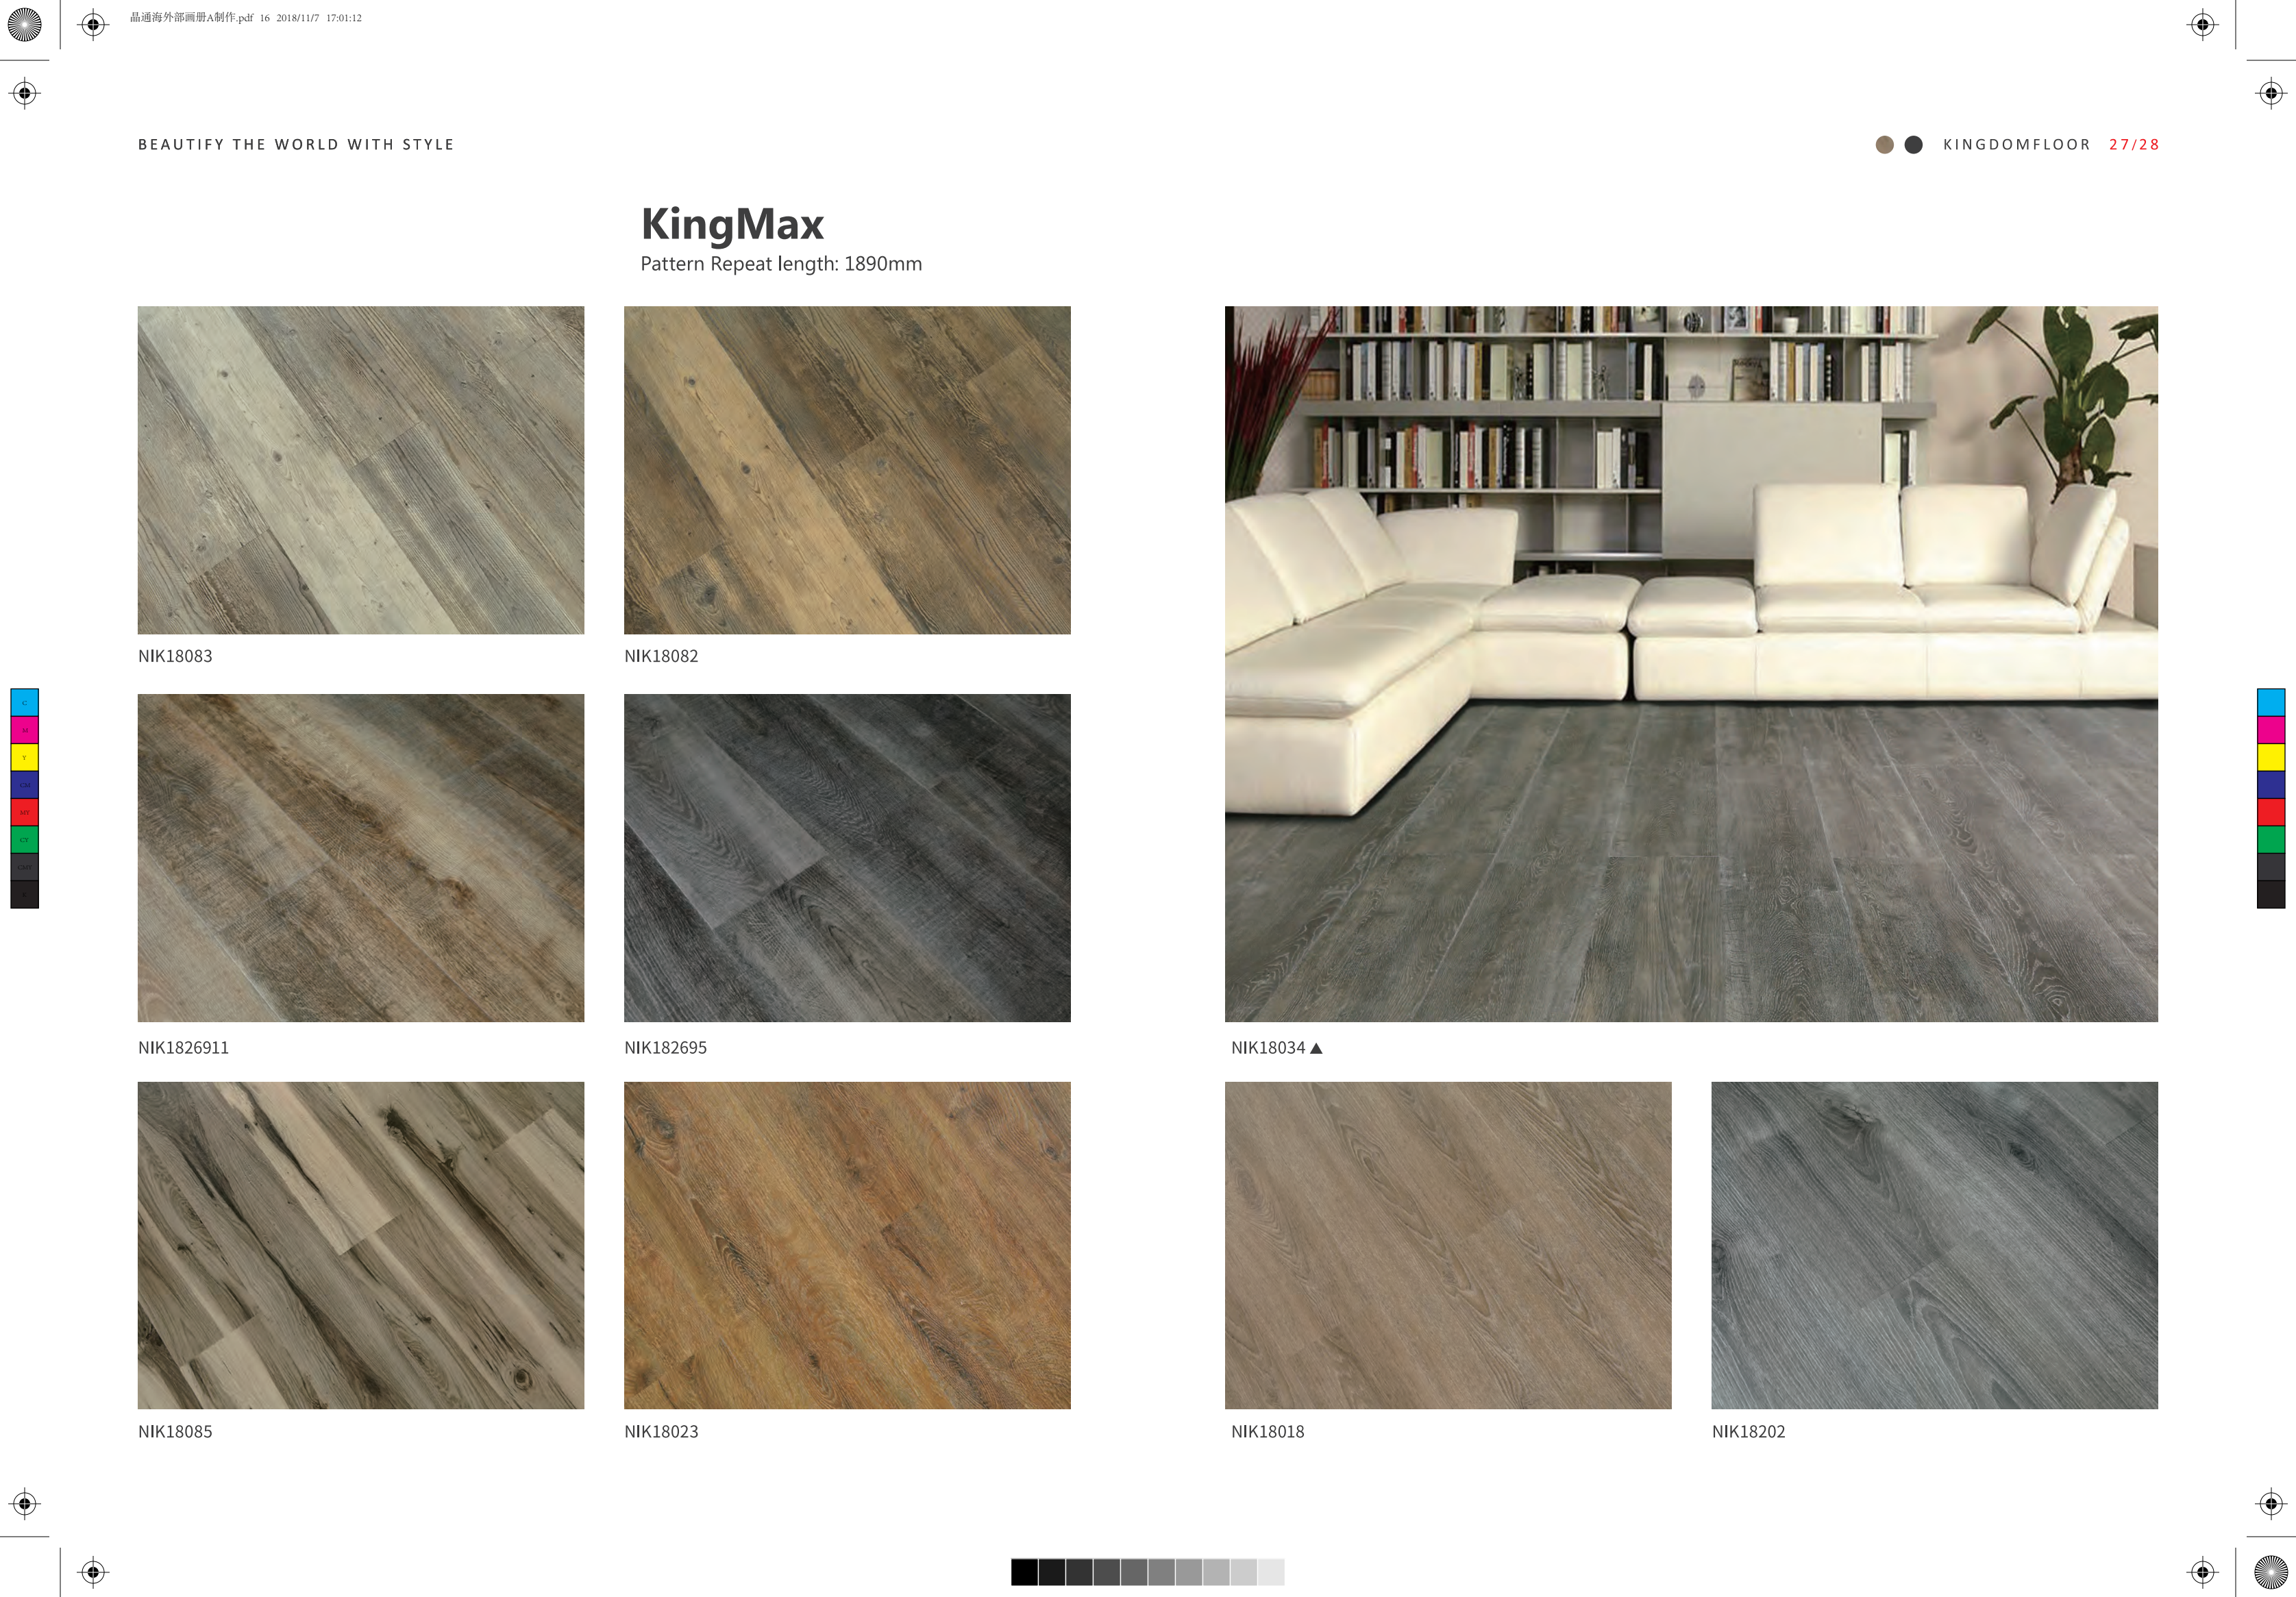

KingMax

Pattern Repeat length: 1890mm



NIK18083



NIK18082



NIK1826911



NIK182695



NIK18034 ▲



NIK18085



NIK18023



NIK18018



NIK18202





BEAUTIFY THE WORLD WITH STYLE




KingSize


Pattern Repeat length: 1570mm




NIK15397



NIK15396




NIK153966




NIK153968




NIK98271



NIK98273



NIK98275



NIK98277


NIK15218 ▲




NIK15143




NIK15152

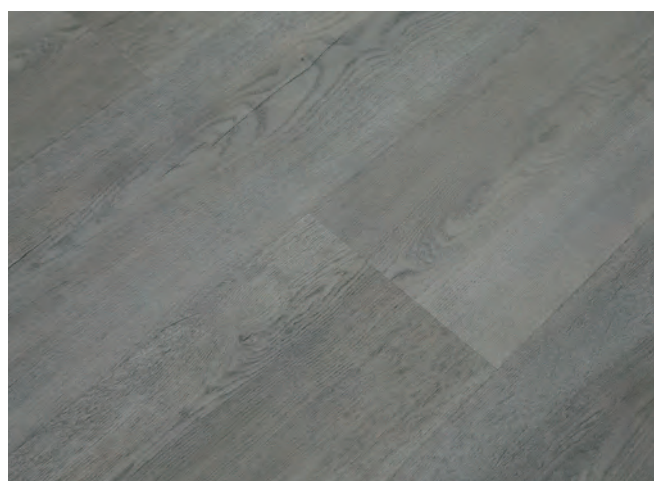


NIK67902




NIK67901



NIK67904



NIK67908



NIK67910





NIK15142 ▲

NIK15081

NIK9400

NIK15051


NIK15059

NIK15070

NIK15169

NIK15054

NIK15083

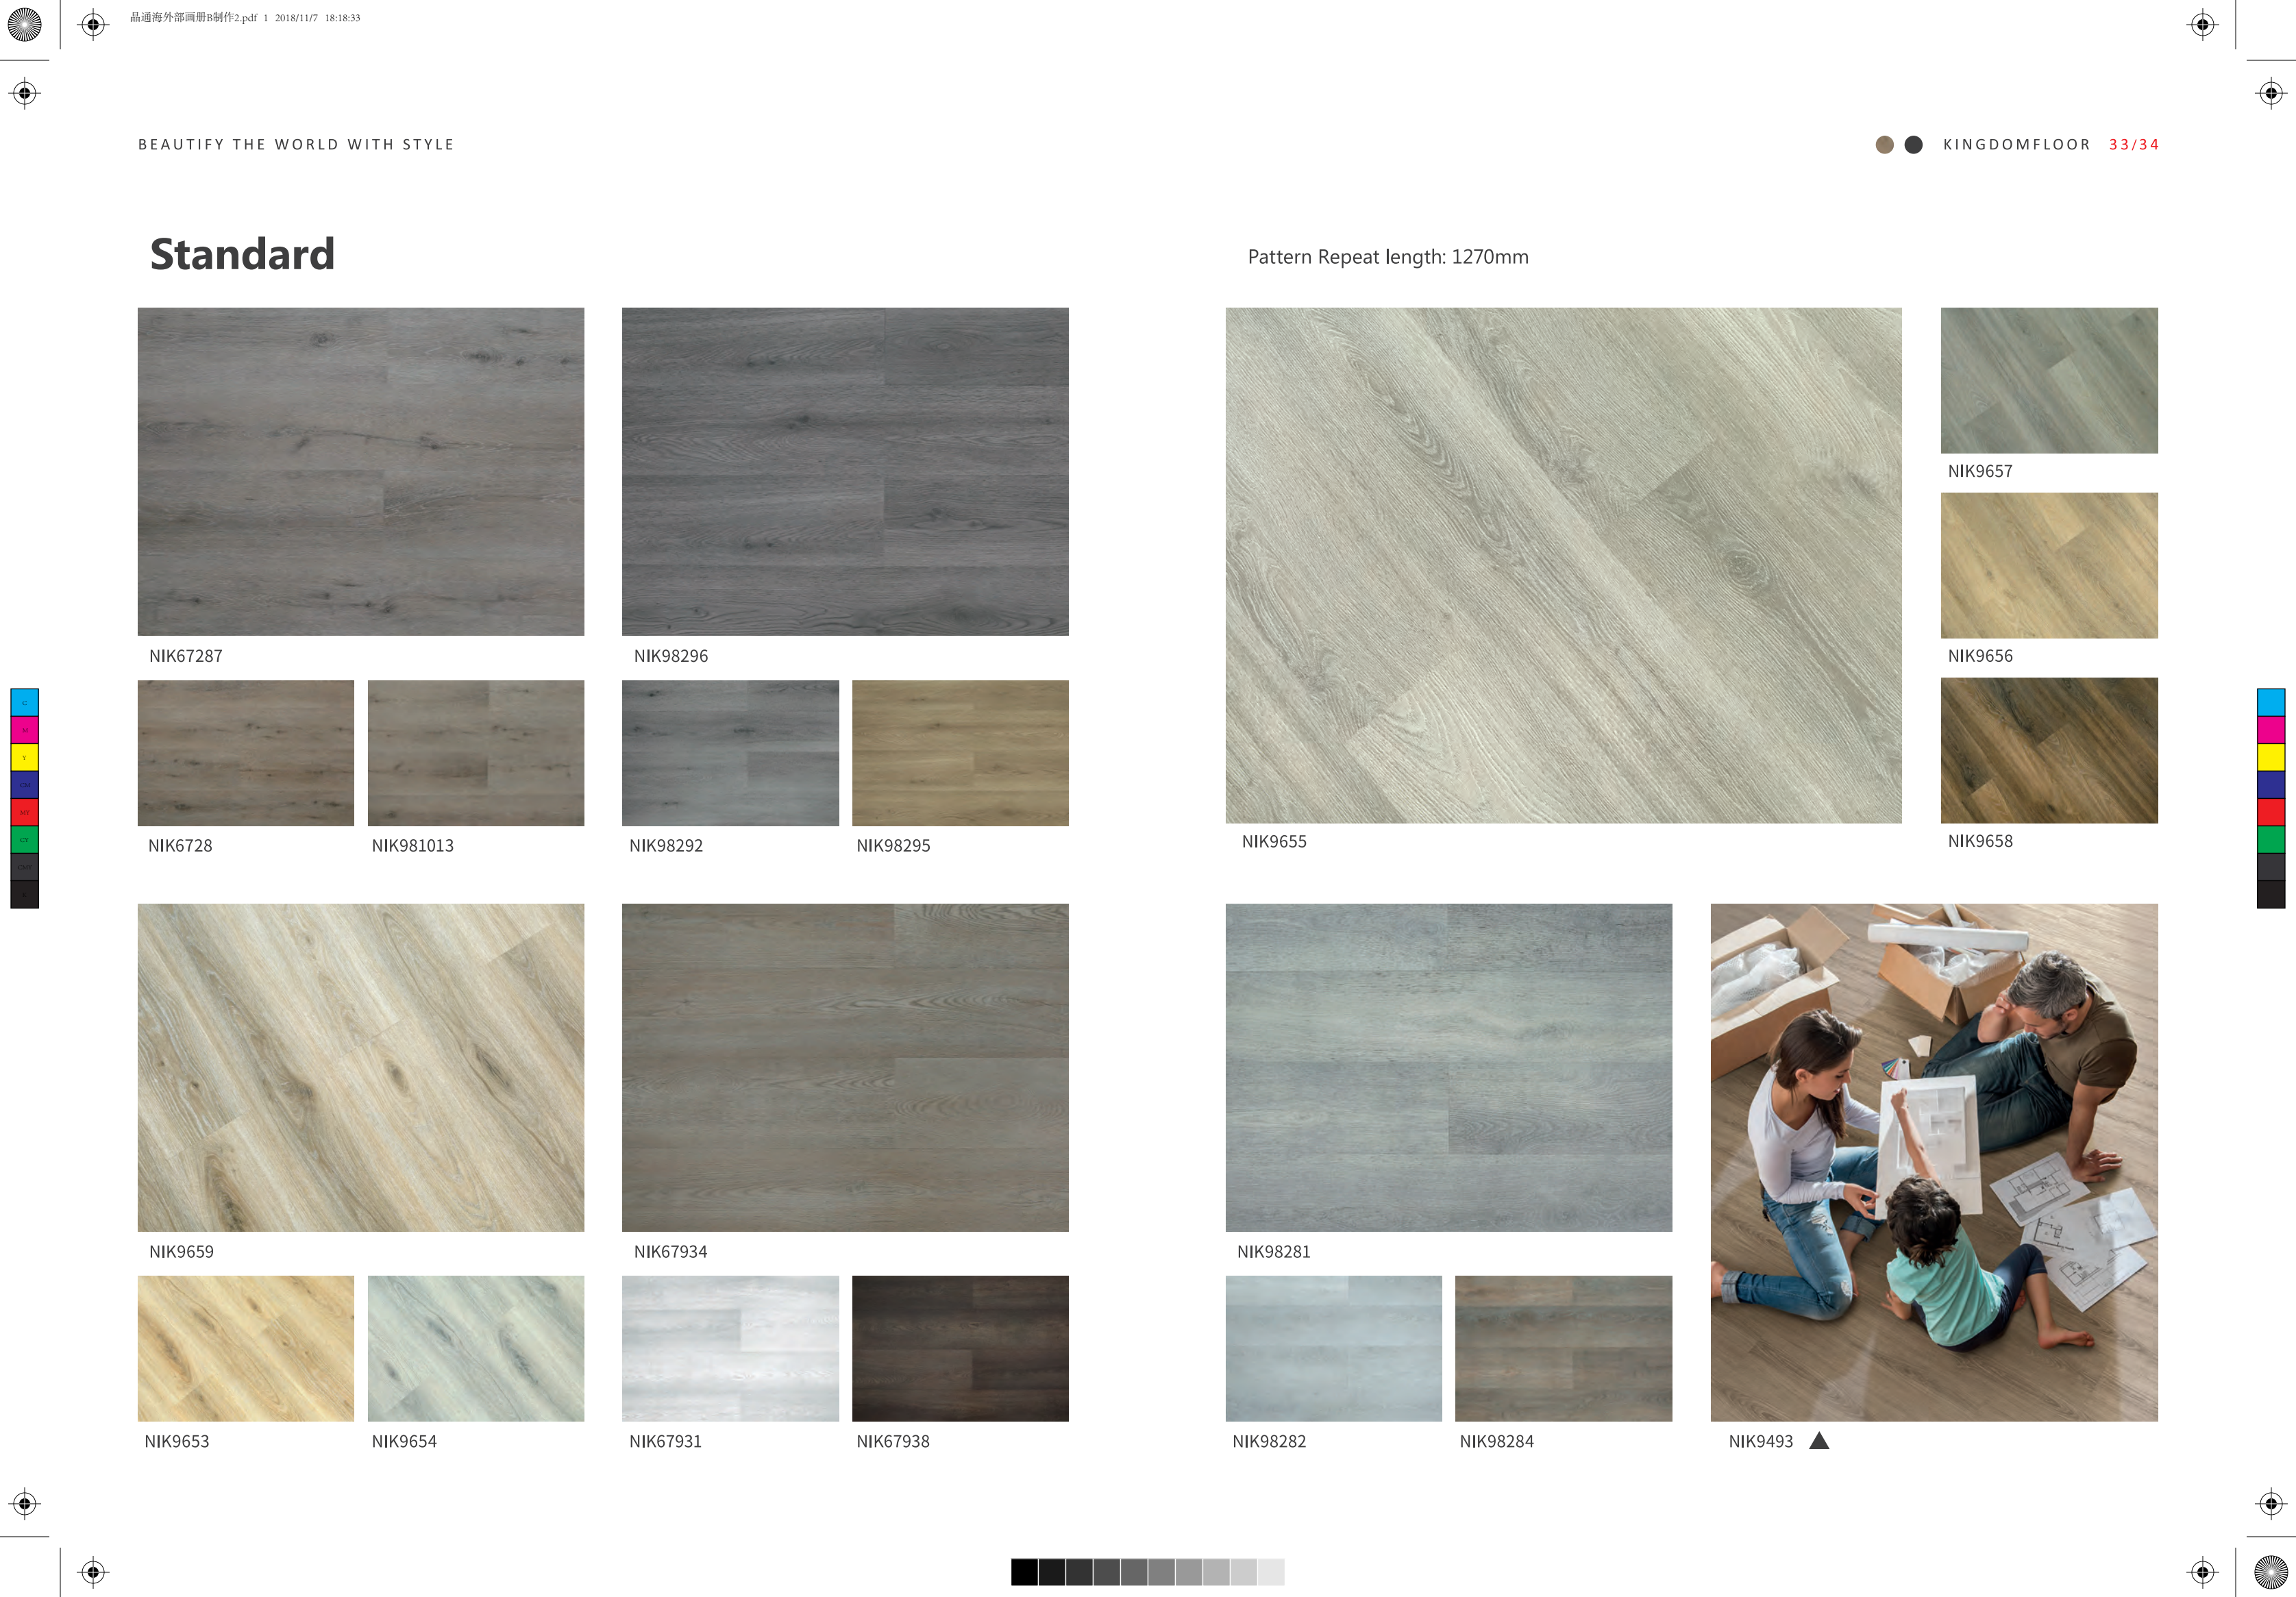


Standard

Pattern Repeat length: 1270mm




NIK67287

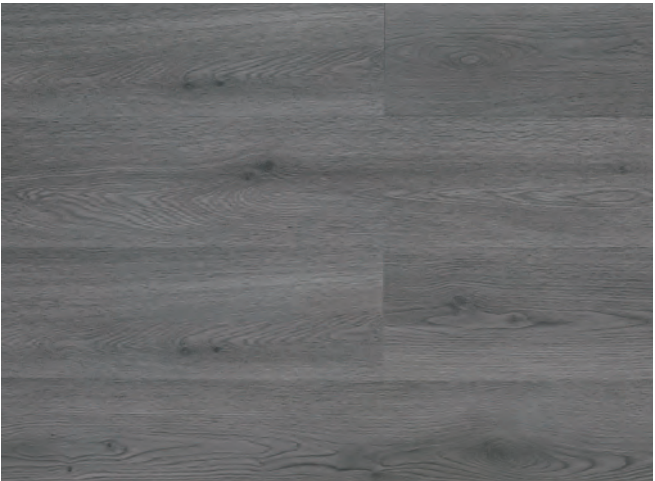


NIK98296



NIK9655



NIK9657



NIK9656



NIK9658



NIK6728



NIK981013



NIK98292



NIK98295



NIK9659



NIK67934



NIK98281



NIK9493 ▲




NIK9653



NIK9654




NIK67931



NIK67938




NIK98282



NIK98284



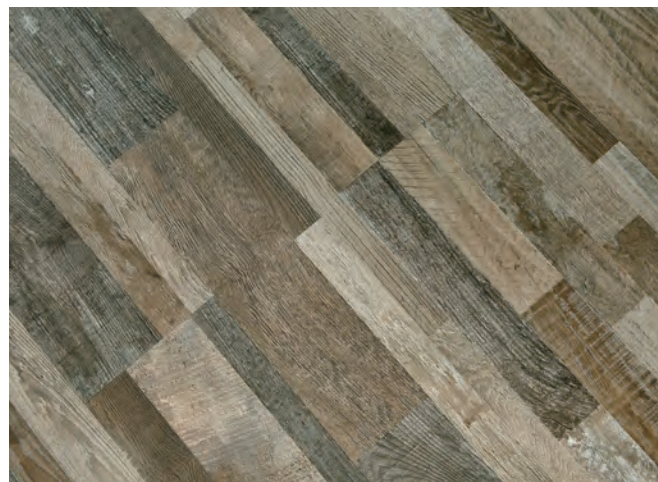


NIK9580




NIK9645



NIK8108 ▲

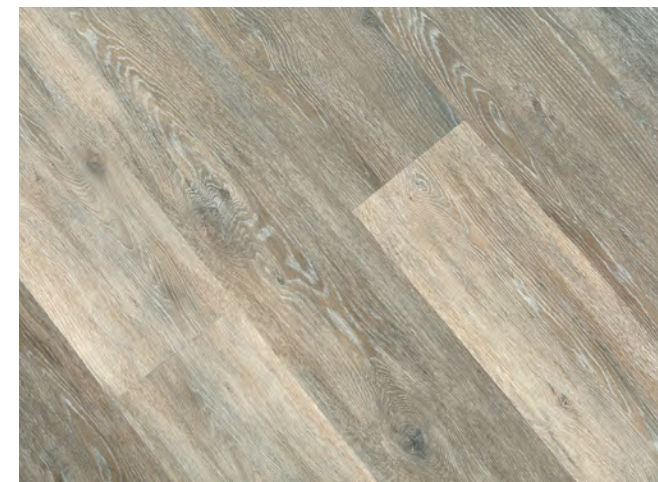


NIK8496

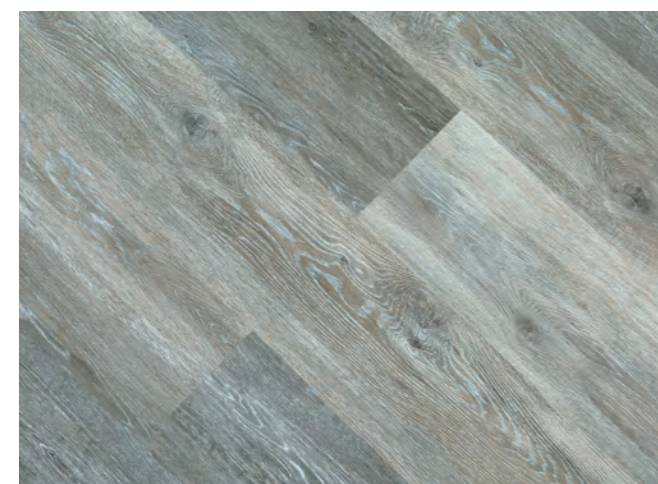

NIK9569



NIK9560

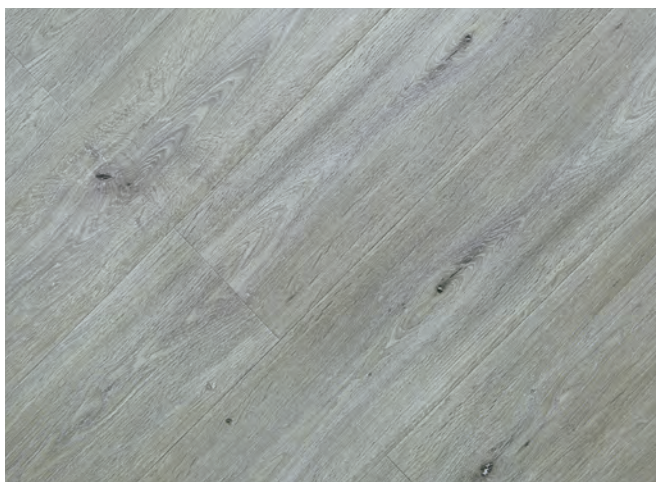


NIK9321



NIK8498



NIK8499





BEAUTIFY THE WORLD WITH STYLE

KINGDOMFLOOR 39/40




NIK68463




NIK68464




NIK154326



NIK154327



NIK154328



NIK154323



NIK68558



NIK68556



NIK68452



NIK68475




NIK68424




NIK68426




NIK68451



NIK68453




NIK68472



NIK68473




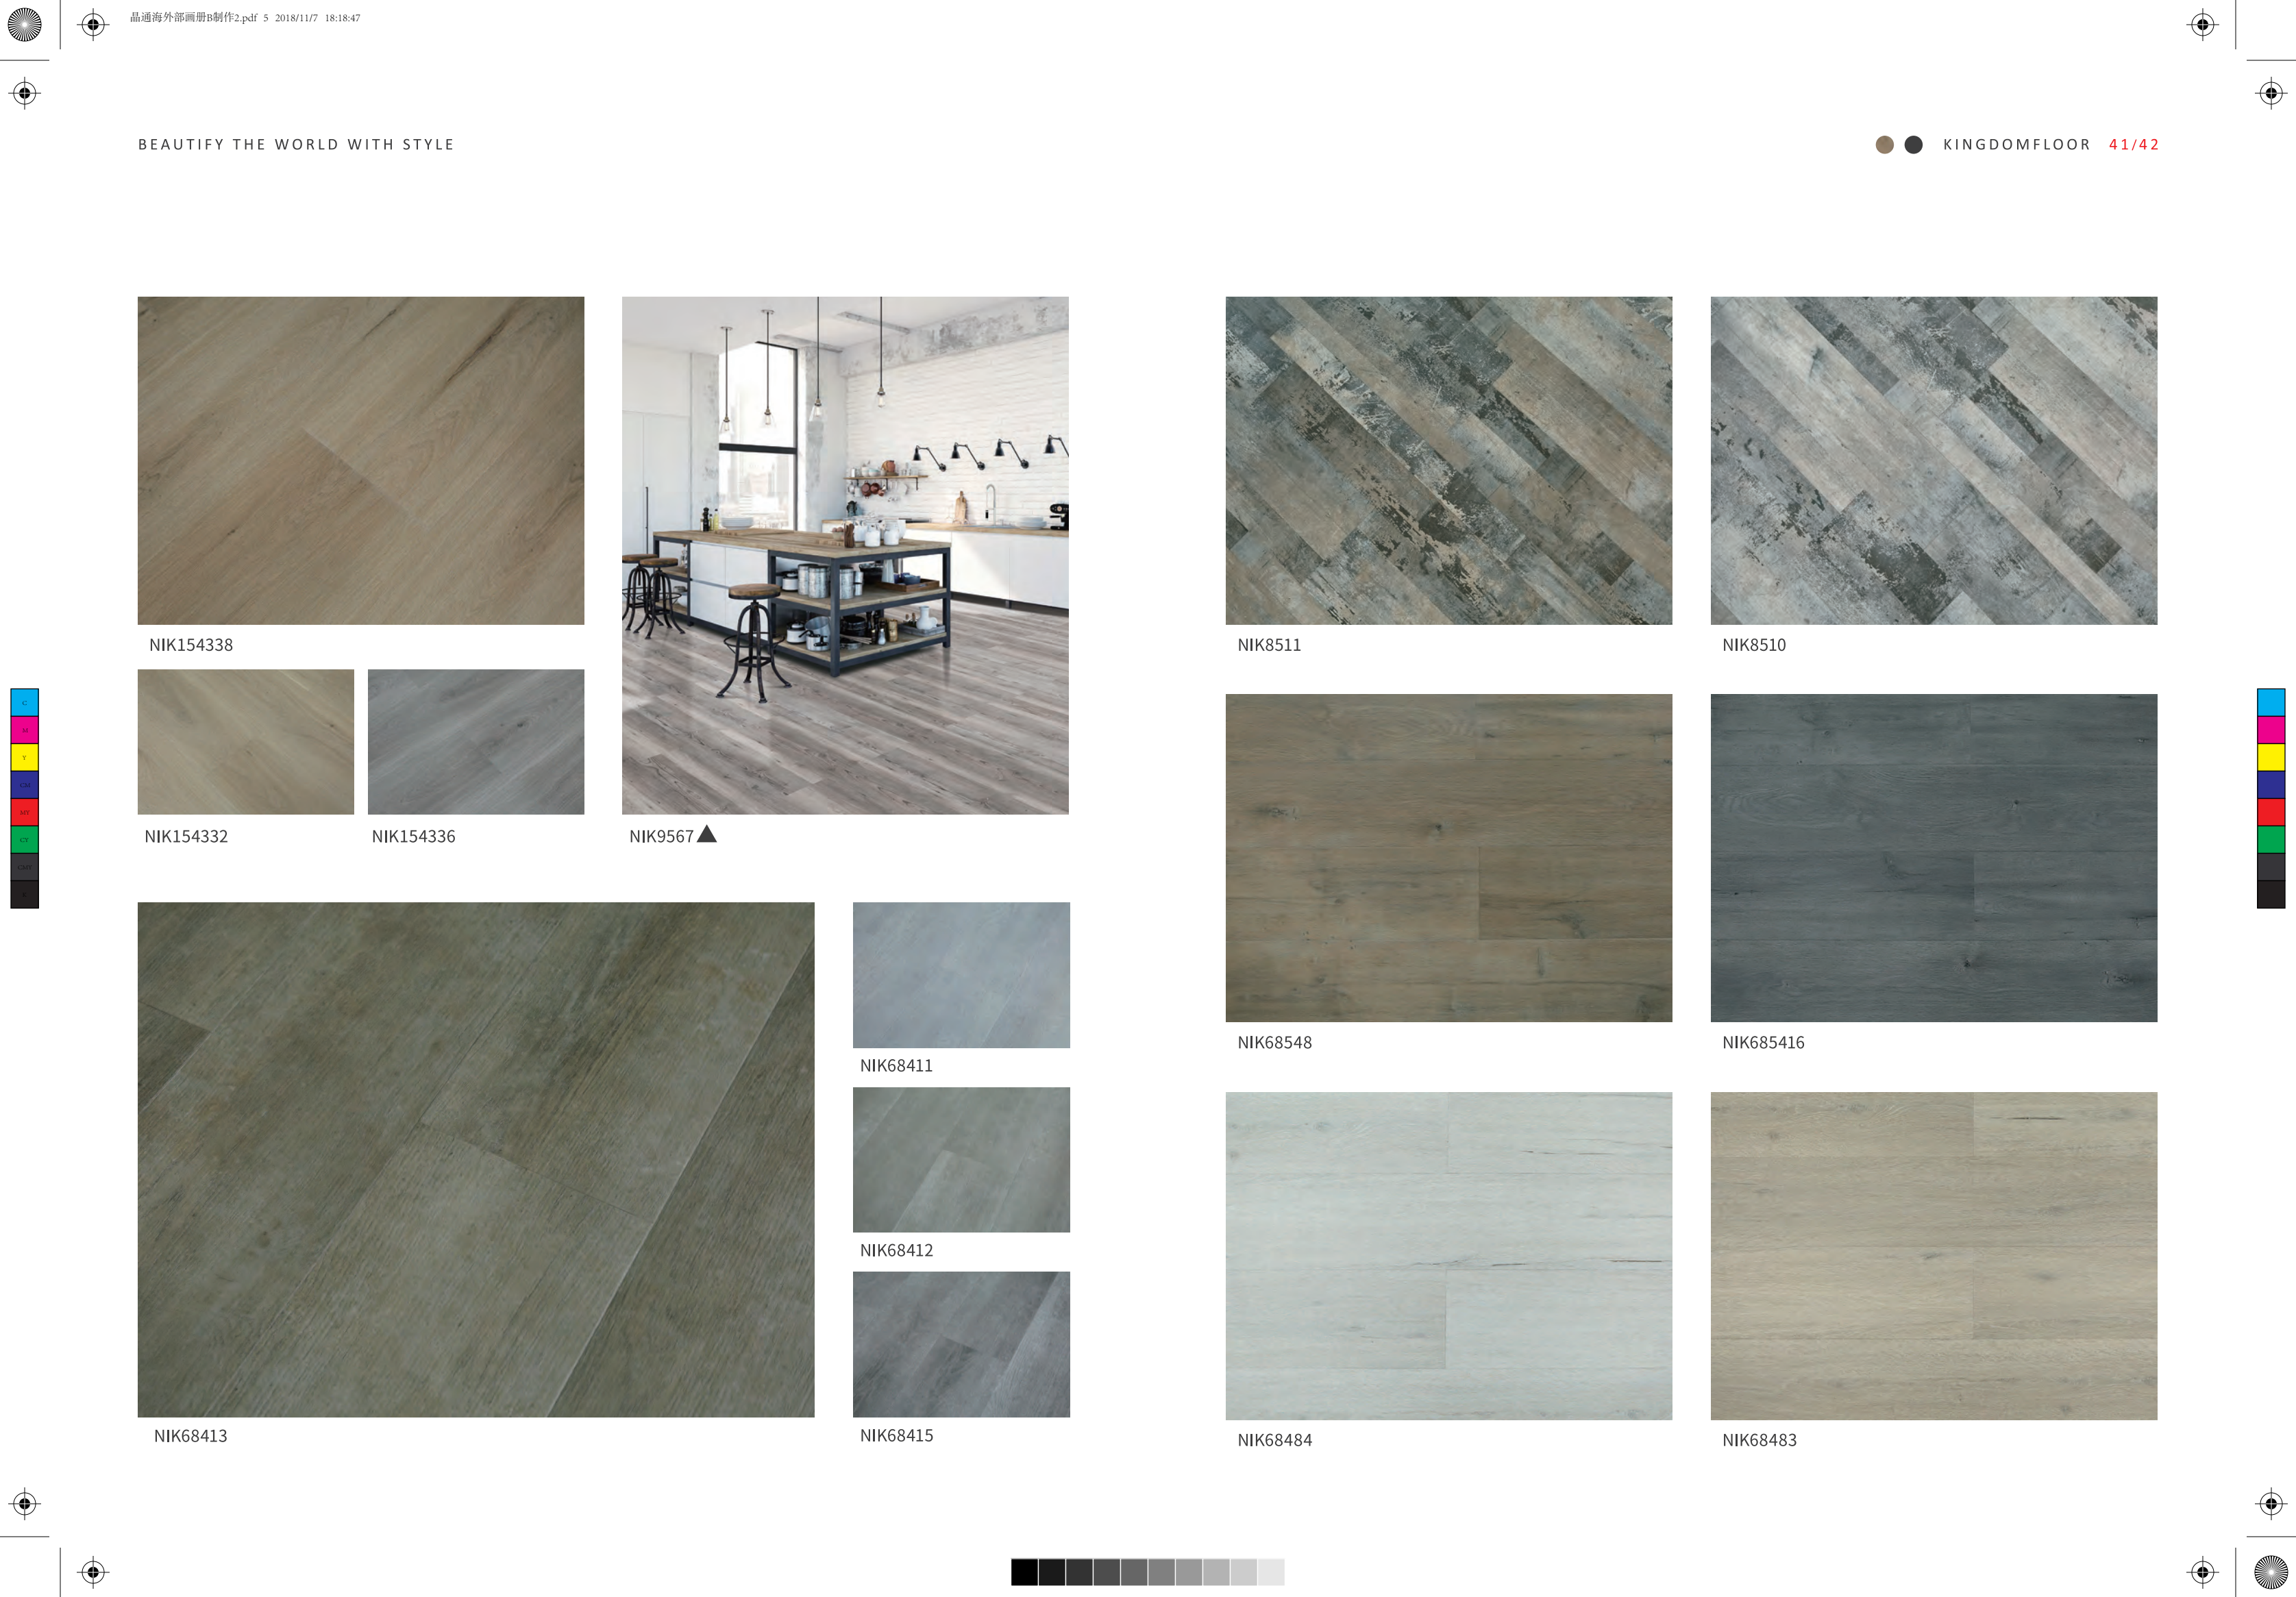

NIK154338




NIK9567 ▲

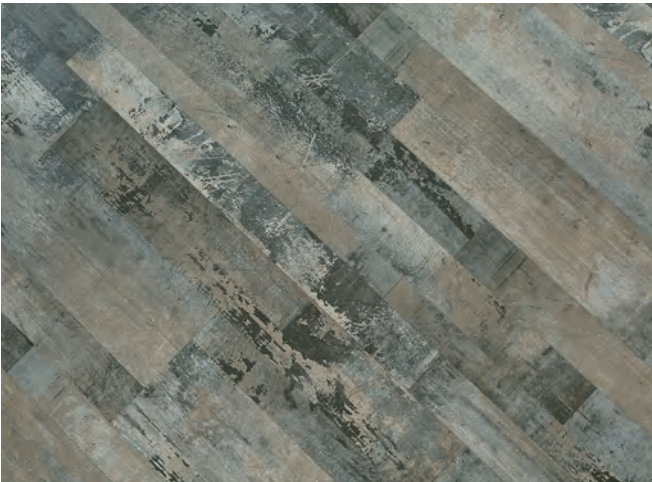

NIK8511



NIK8510




NIK154332



NIK154336



NIK68413




NIK68411



NIK68412



NIK68415

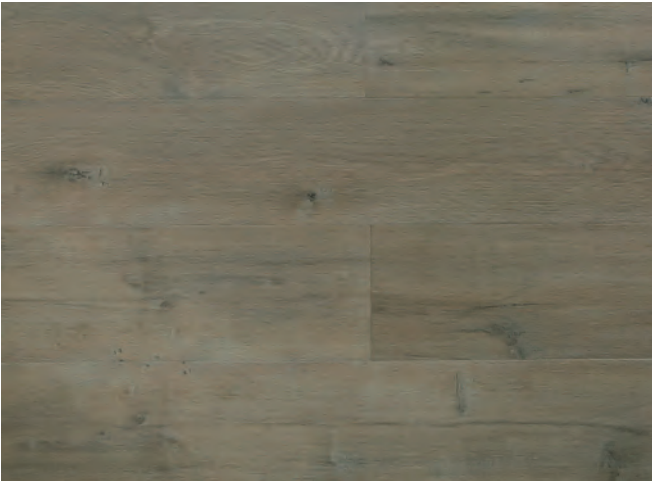

NIK68548



NIK685416



NIK68484



NIK68483





NIK6852




NIK68431



NIK9655 ▲



NIK8728

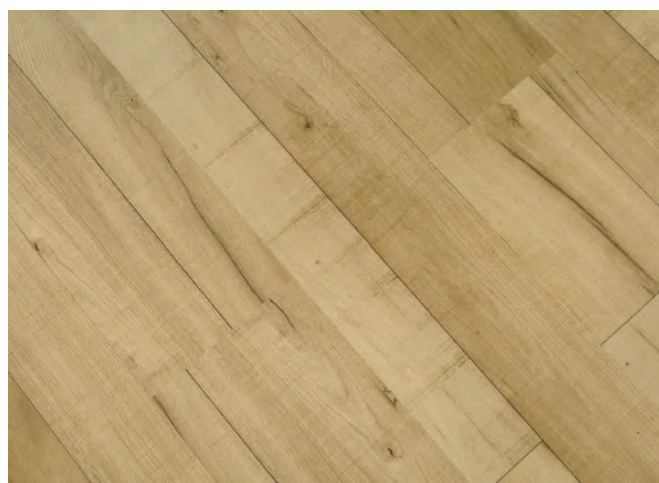

NIK8750



NIK68283



NIK68501



BEAUTIFY THE WORLD WITH STYLE

KINGDOMFLOOR 45/46

STONE

Inspiration From The Earth

Simulates natural texture with
the delicate softness of carved stone.
Stain and wear-resistant and safe from radiation
unlike natural stone,
which is used for luxurious
hotels and decorating residential and
commercial spaces.


NIK3479 ▲



NIK372811



NIK37281




NIK37285




NIK37287



NIK37583



NIK37581



NIK375812



NIK37855




NIK37851



NIK37852



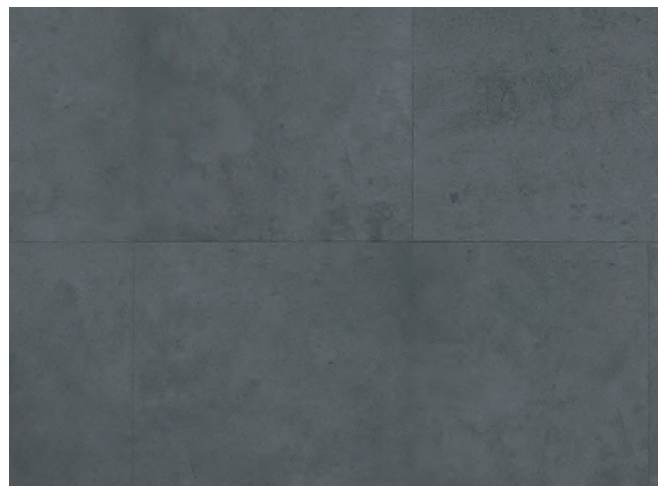

NIK3775



NIK37754



NIK37903



NIK37905



NIK37558



NIK37553




NIK31016 ▲




NIK37866



NIK38051



NIK37861



NIK37862




NIK38056



NIK38058



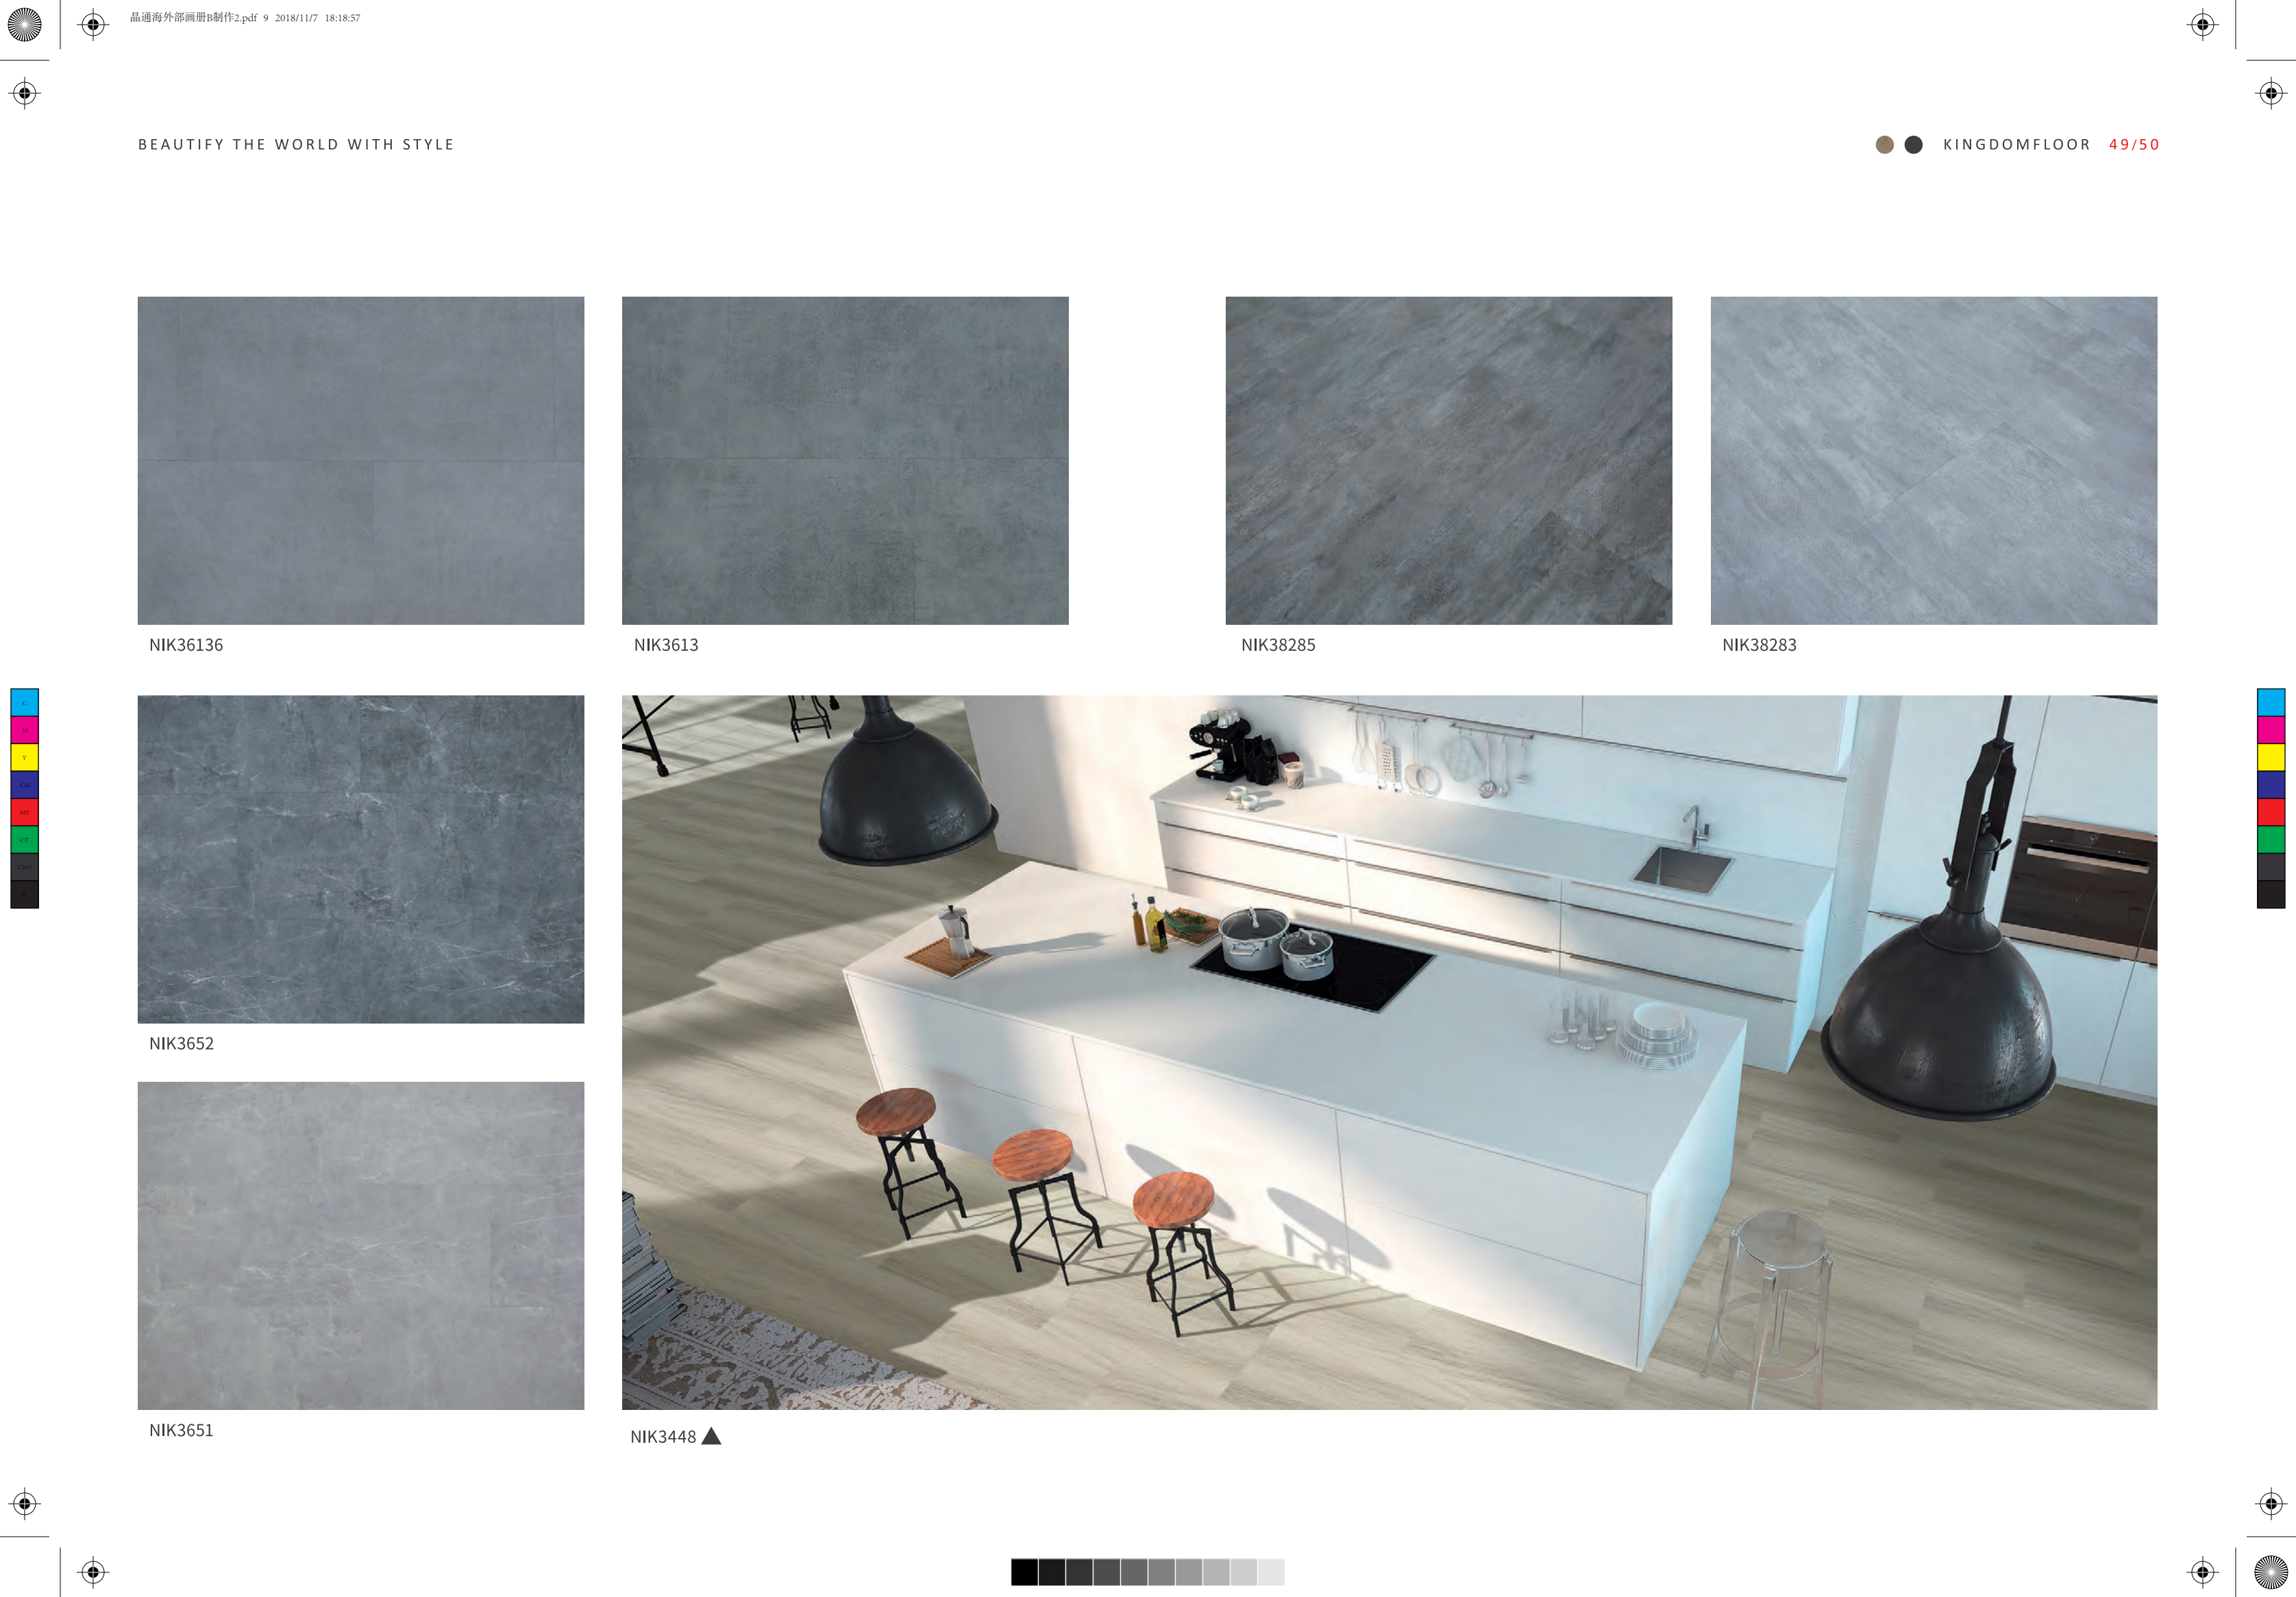

NIK36136



NIK3613



NIK38285



NIK38283



NIK3652



NIK3651



NIK3448 ▲






BEAUTIFY THE WORLD WITH STYLE


KINGDOMFLOOR 51/52



NIK37872

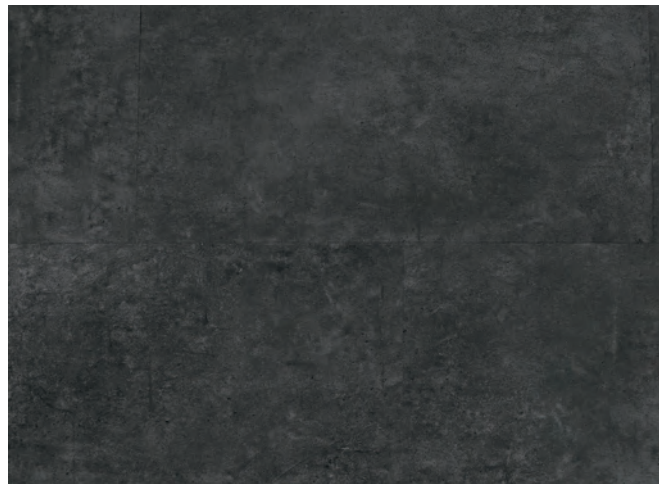


NIK38126

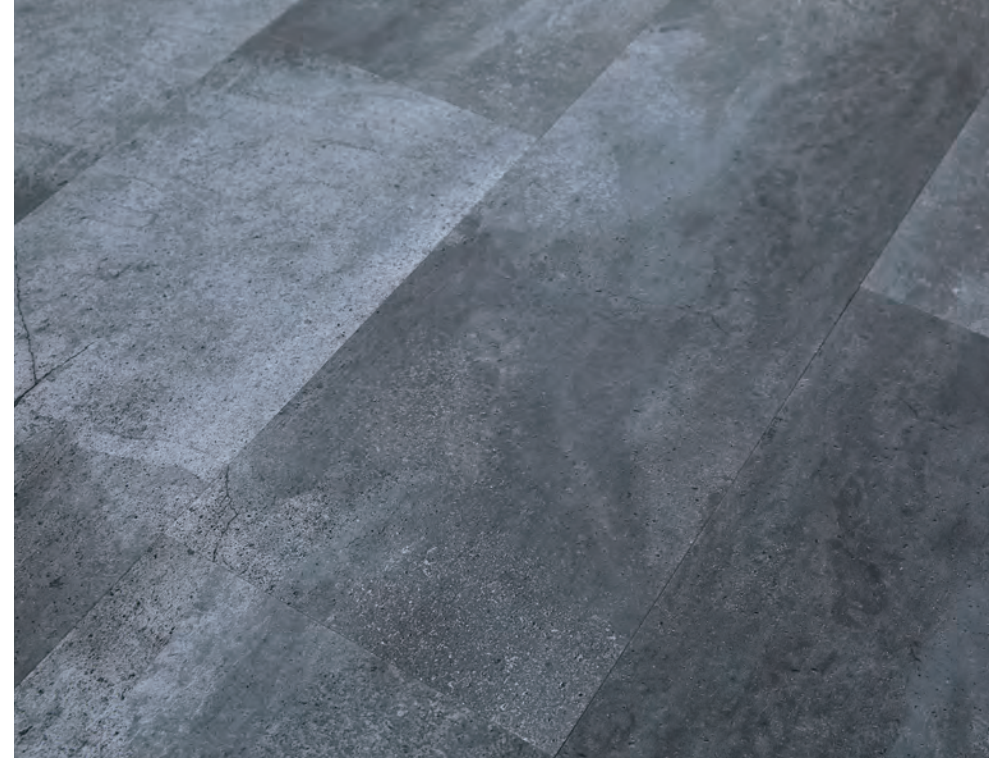

NIK38273




NIK38271



NIK38274



NIK37871



NIK37873



NIK38121



NIK38123



NIK38279



NIK38253



NIK38256



NIK382512



NIK3595





NIK37943 ▲

SQUARE TILE

Regeneration Of Ceramic Art

Square tile designs are especially produced for precise 24" *24" format tile ,this big size tile creates an impressive and outstanding environment which is normally created by ceramic tiles ,applicable for both residential and commercial spaces.



NIK38225



NIK38228




NIK3598 ▲



NIK38235



NIK38234

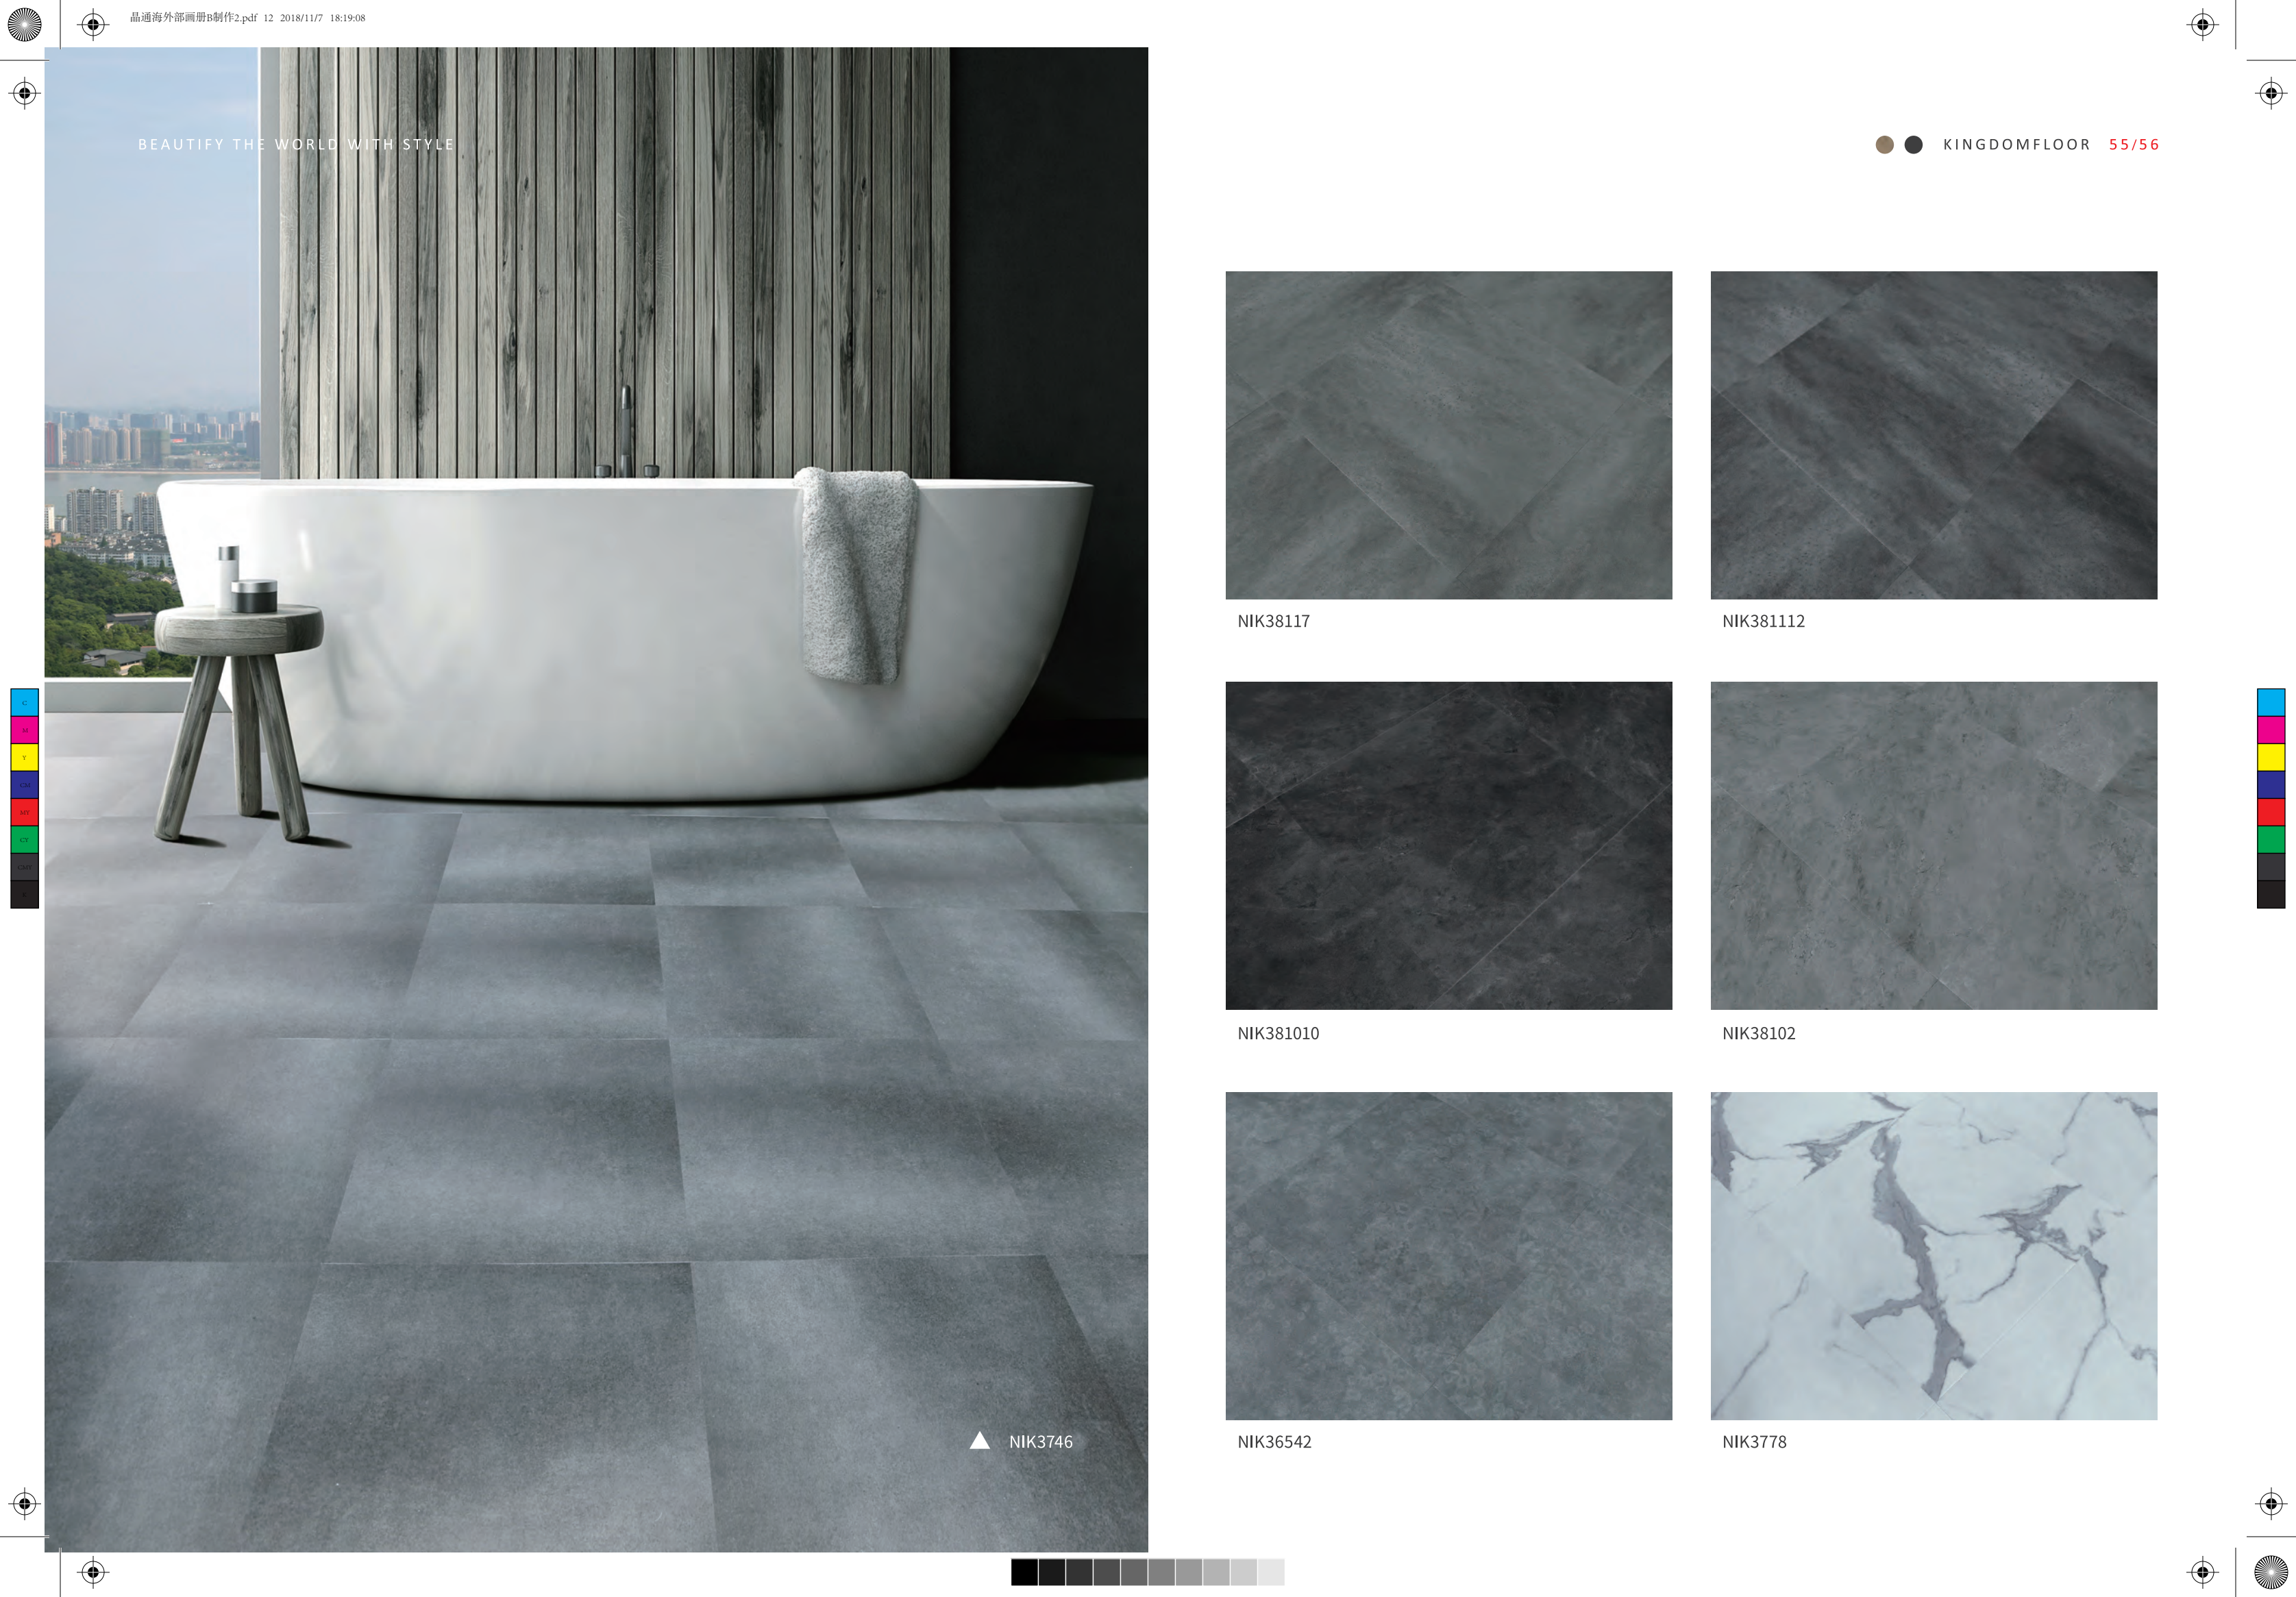

BEAUTIFY THE WORLD WITH STYLE



NIK38117




NIK381112



NIK381010



NIK38102

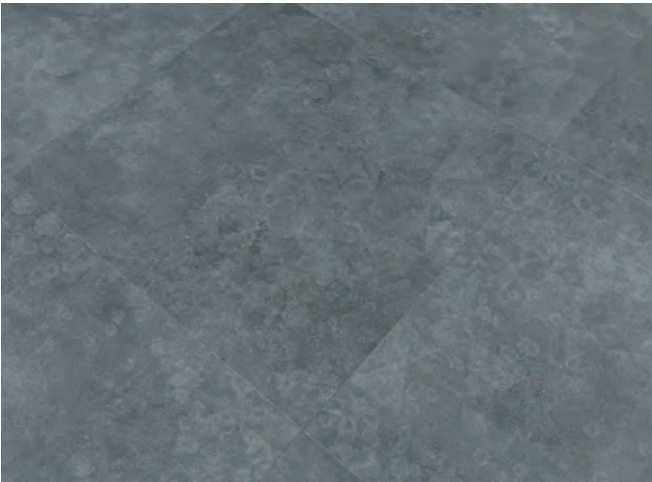


NIK36542



NIK3778

▲ NIK3746



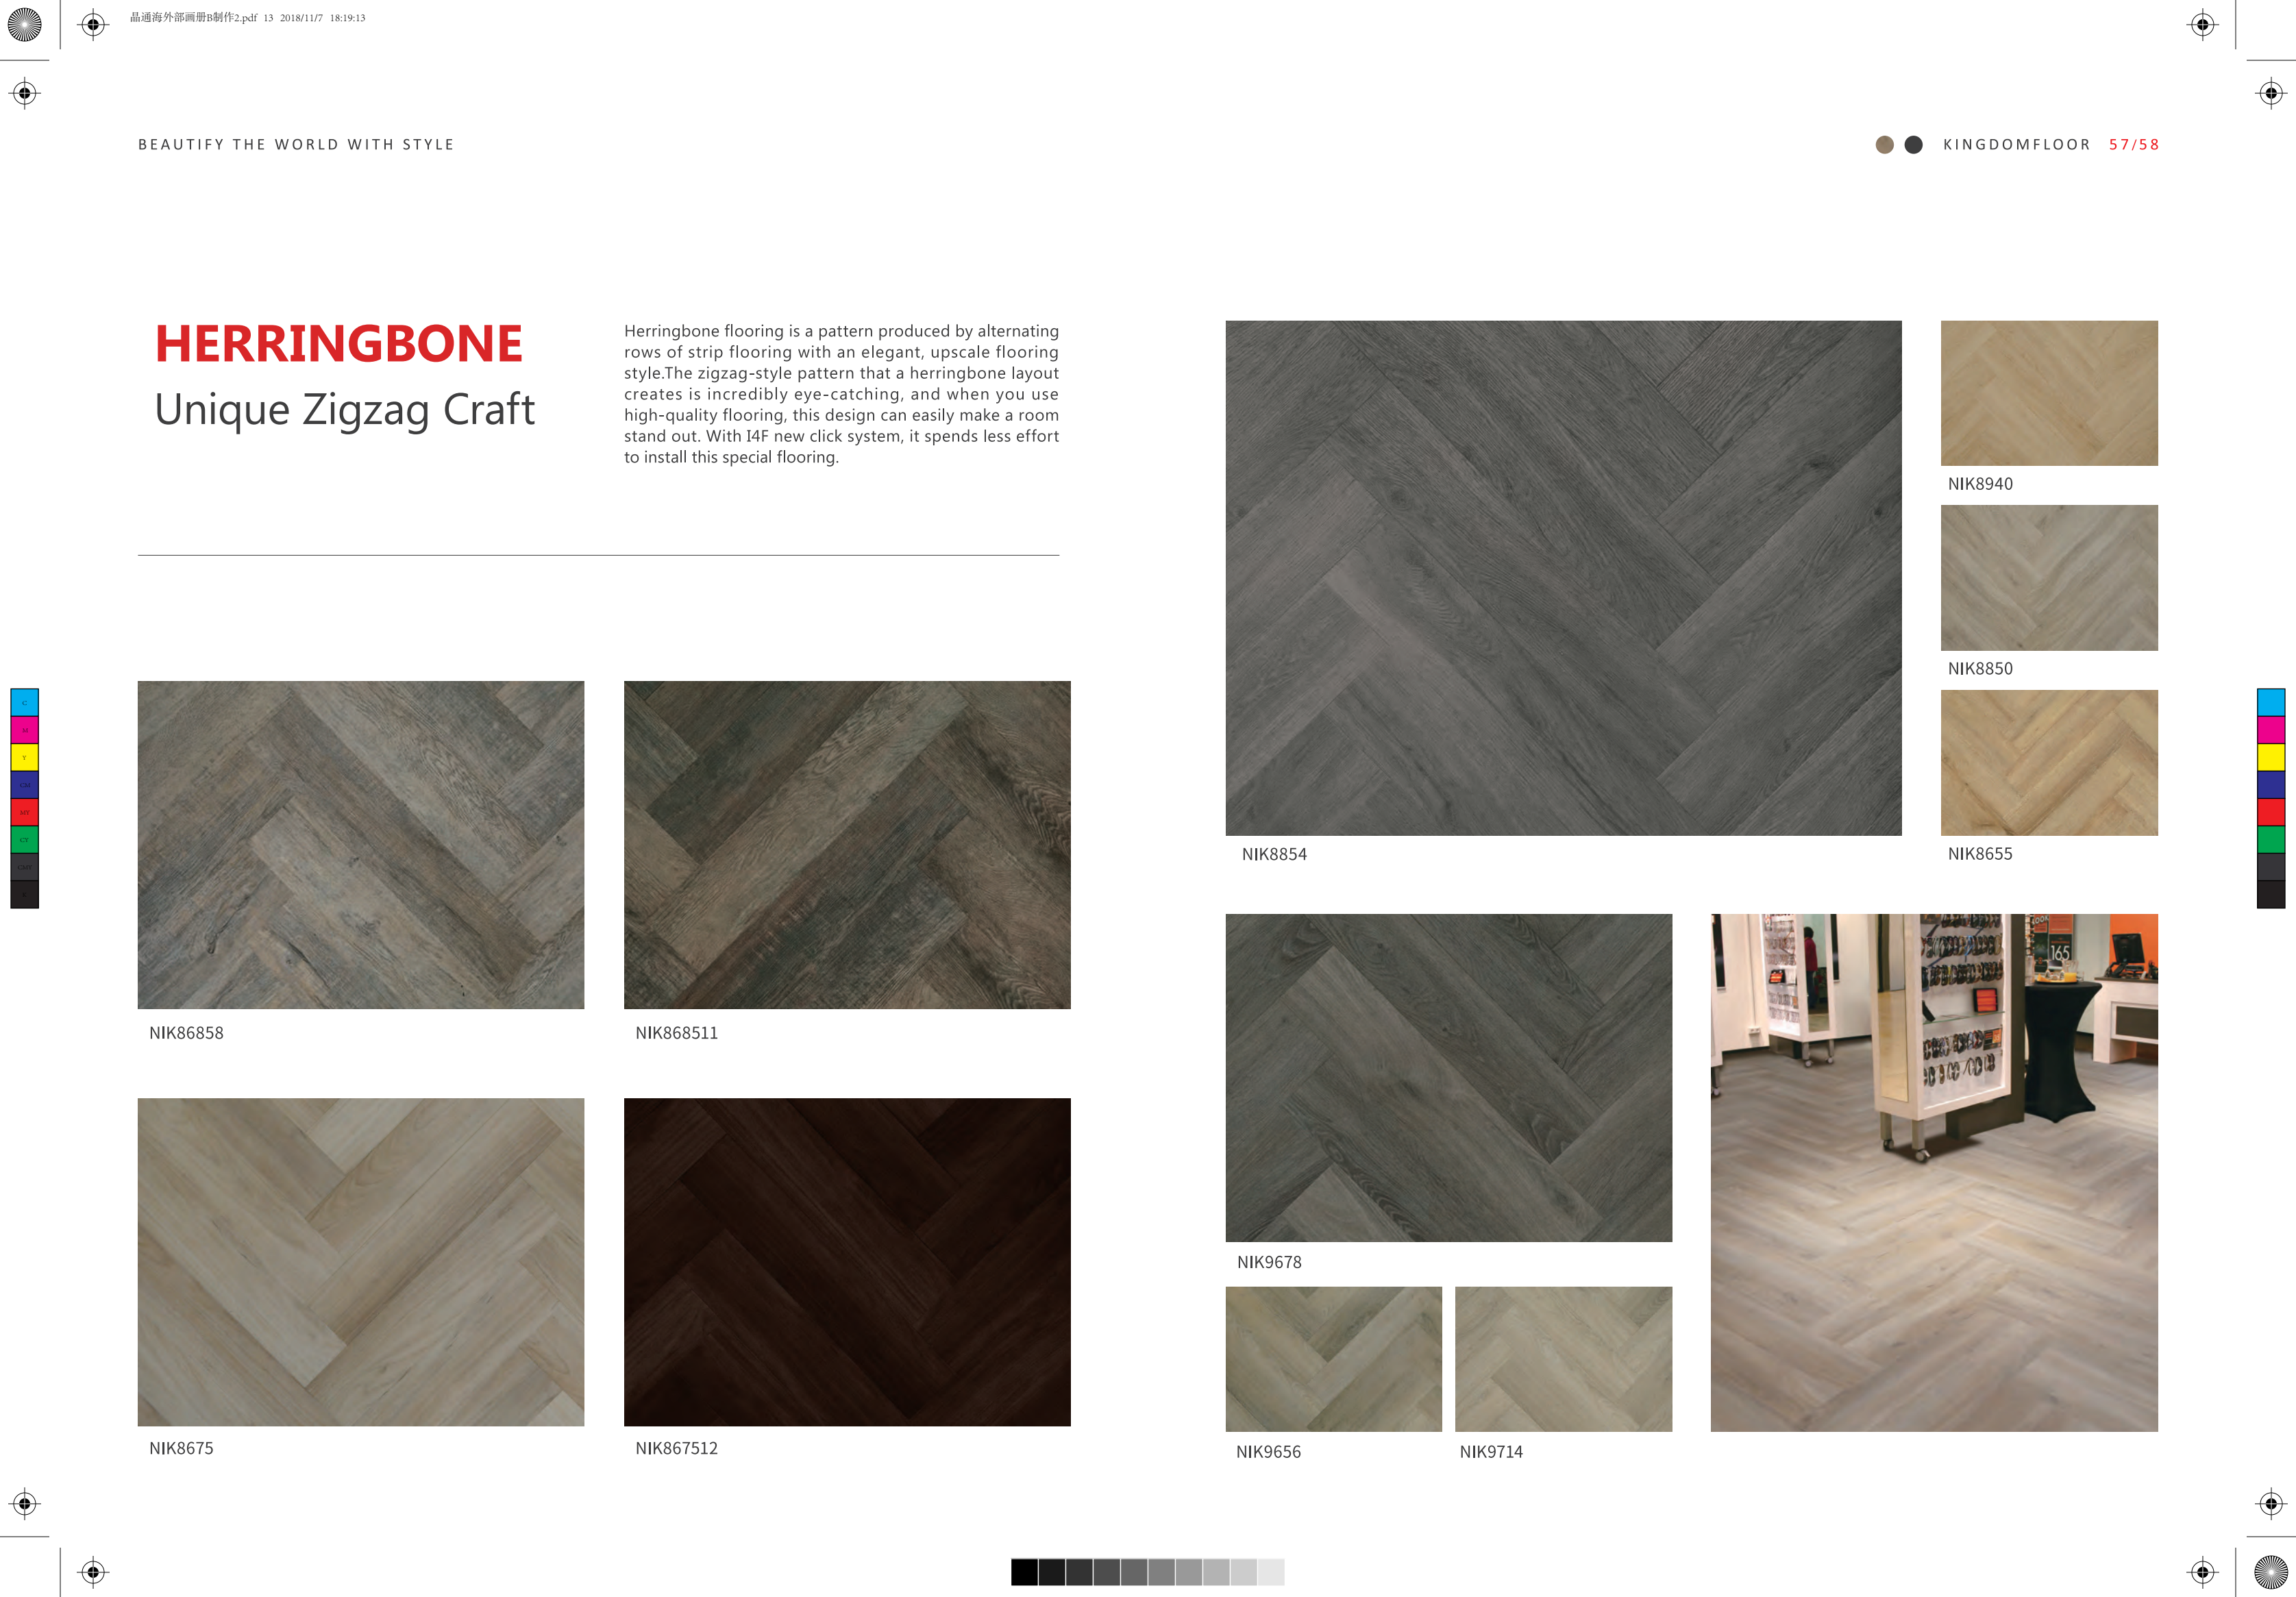

HERRINGBONE

Unique Zigzag Craft


Herringbone flooring is a pattern produced by alternating rows of strip flooring with an elegant, upscale flooring style. The zigzag-style pattern that a herringbone layout creates is incredibly eye-catching, and when you use high-quality flooring, this design can easily make a room stand out. With I4F new click system, it spends less effort to install this special flooring.



NIK8854



NIK8940




NIK8850




NIK8655




NIK86858

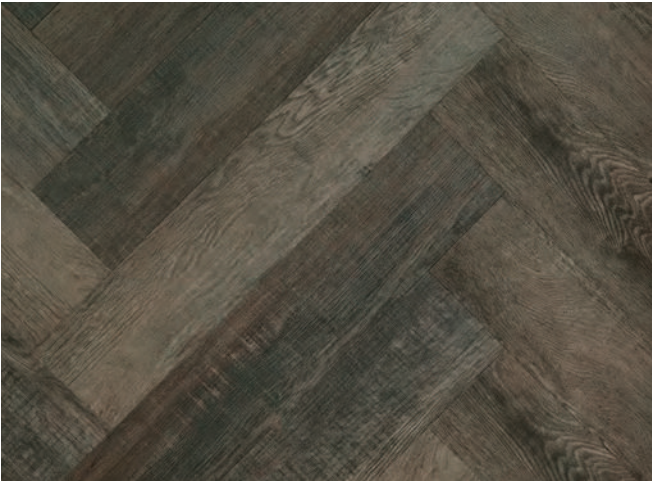

NIK868511

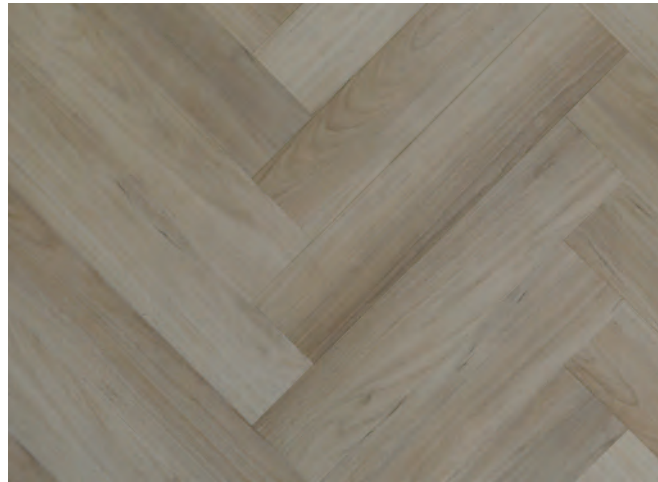


NIK8675

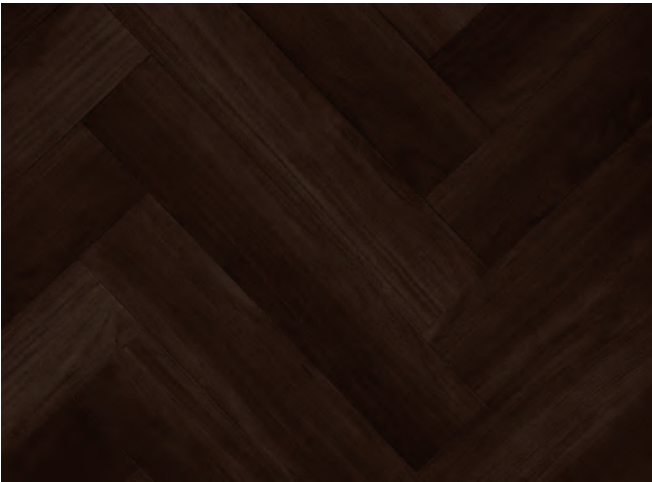


NIK867512



NIK9678




NIK9656




NIK9714



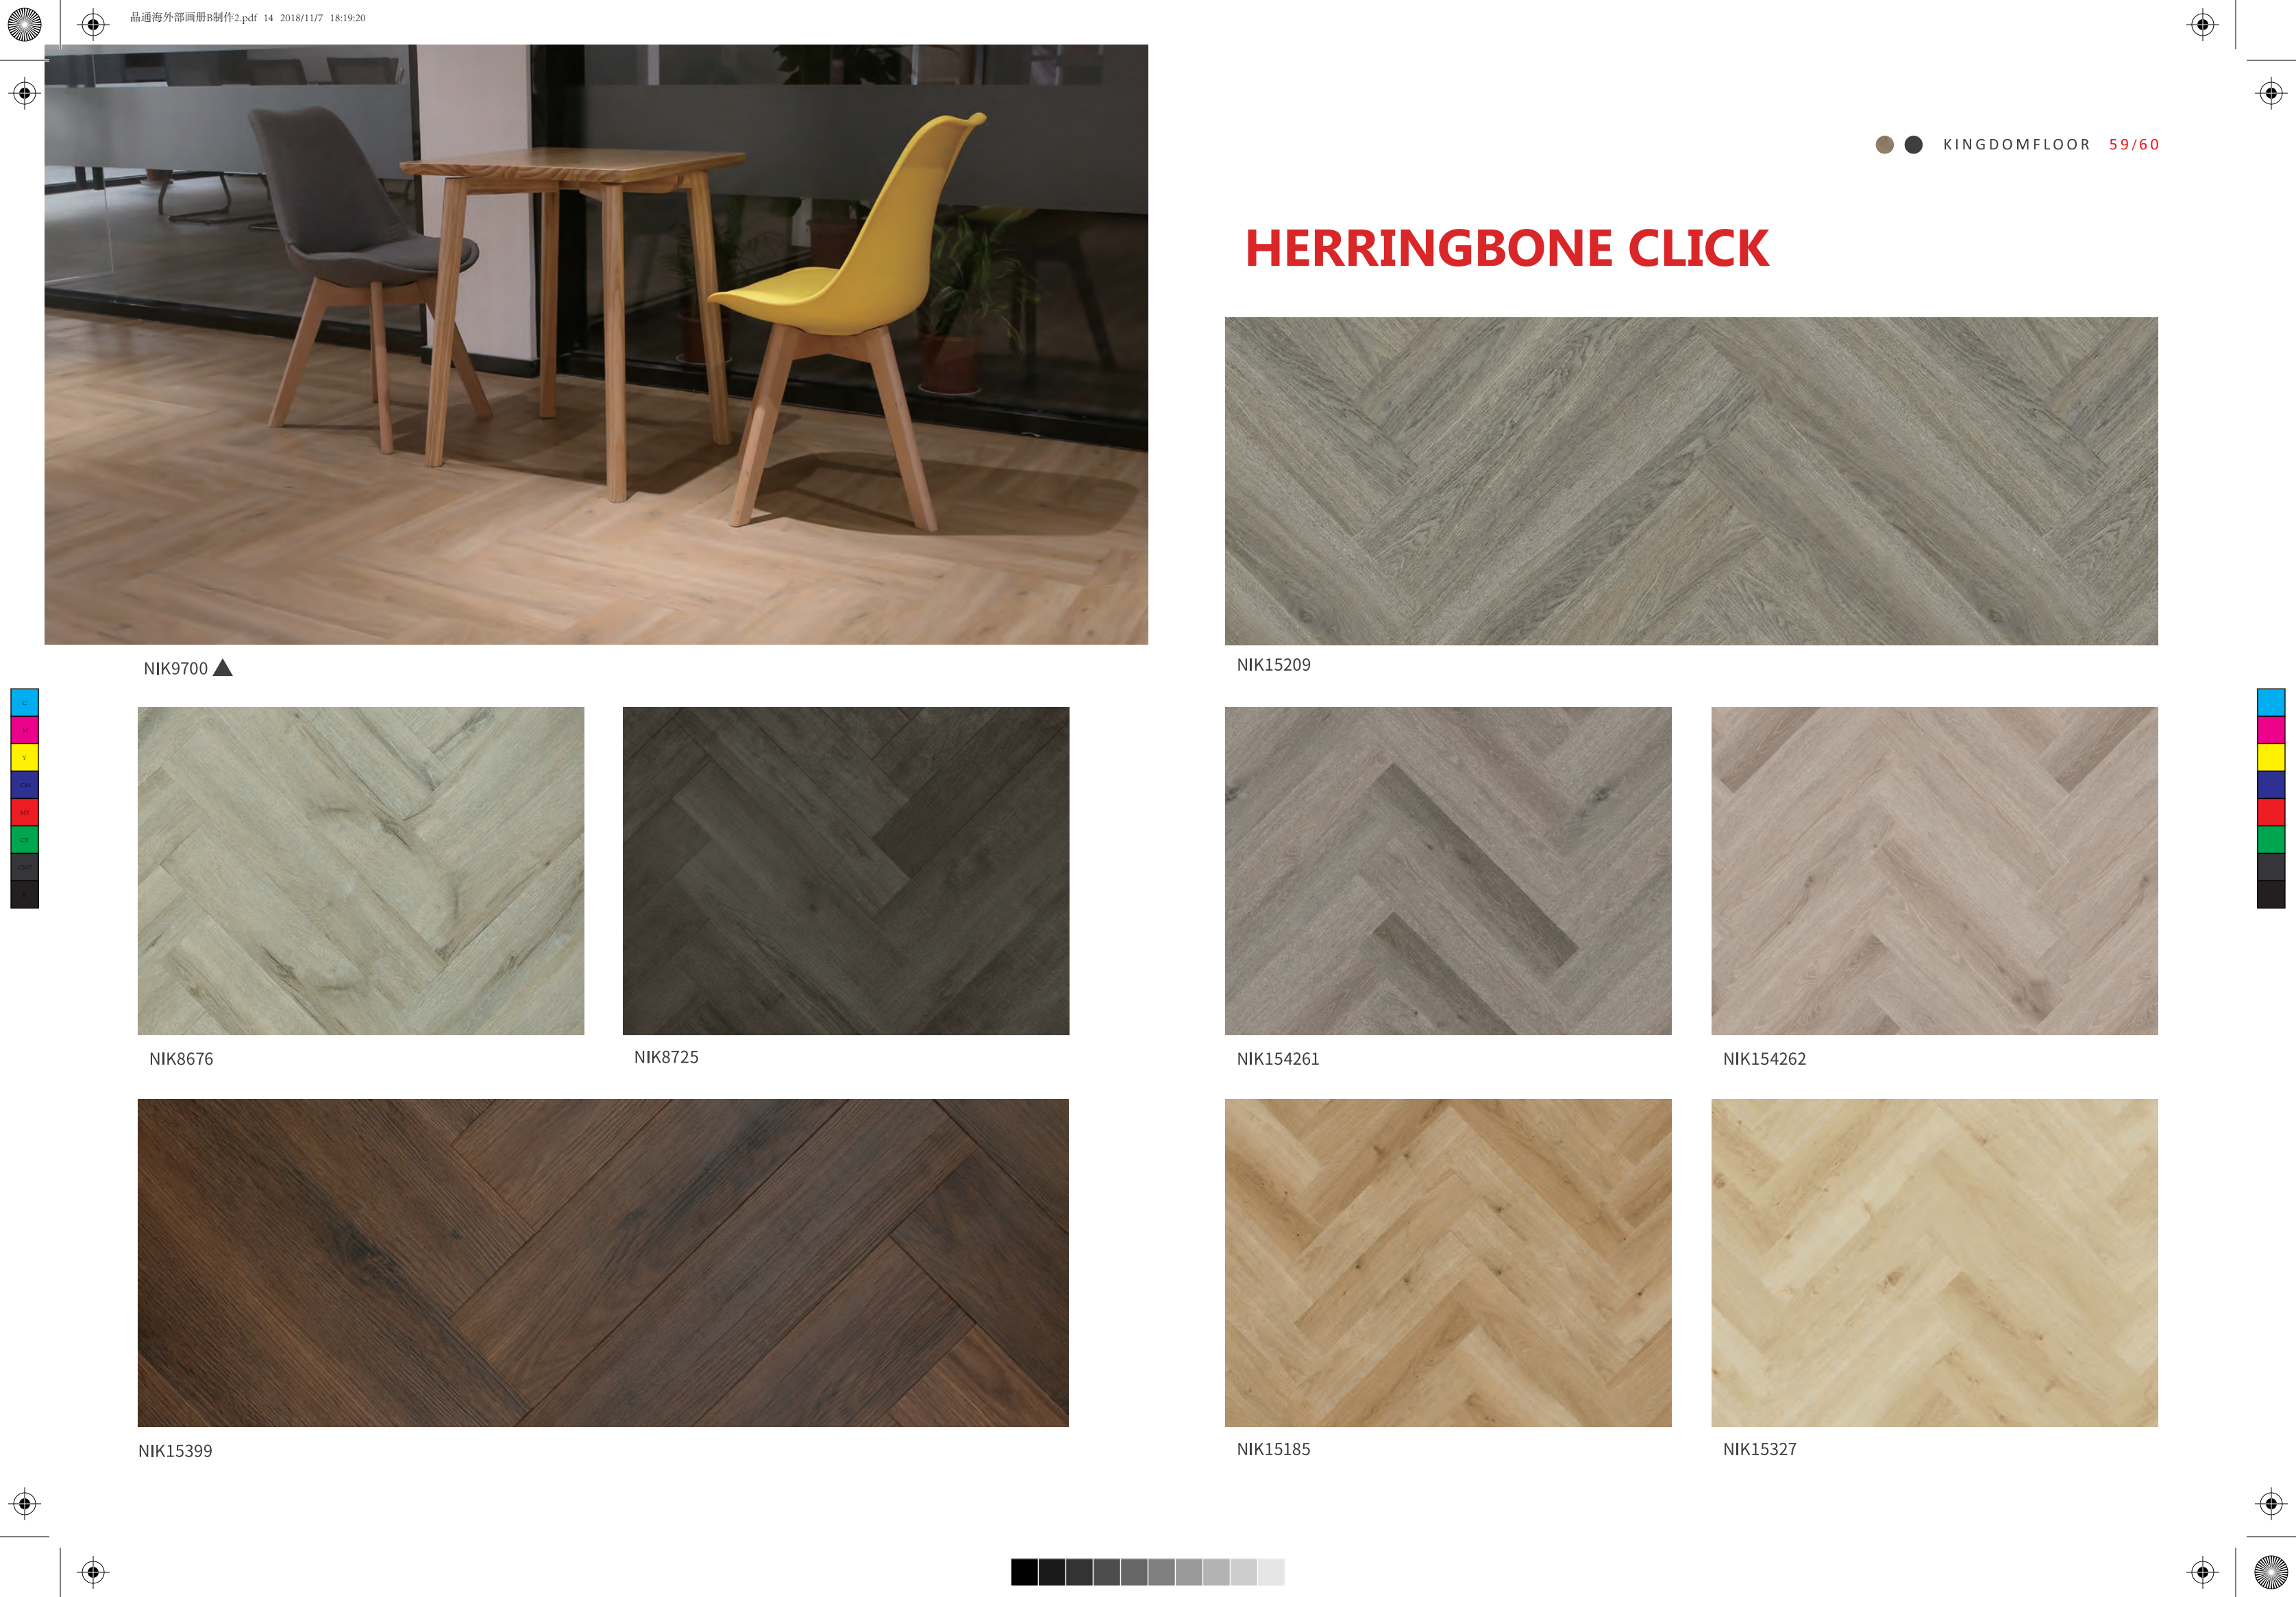


NIK9700 ▲

NIK15209

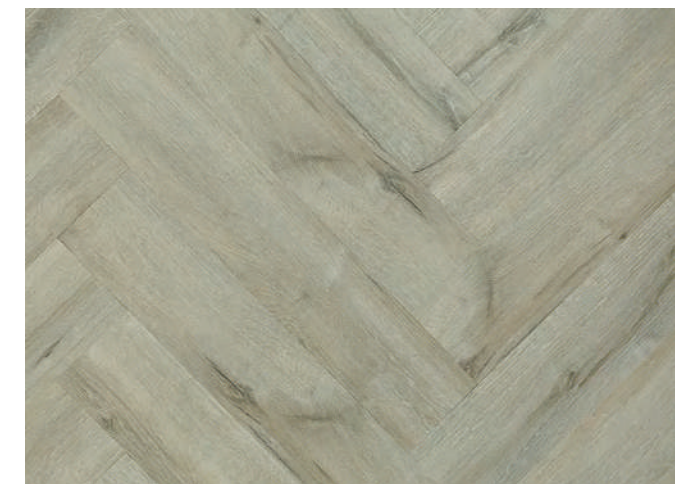


NIK8676

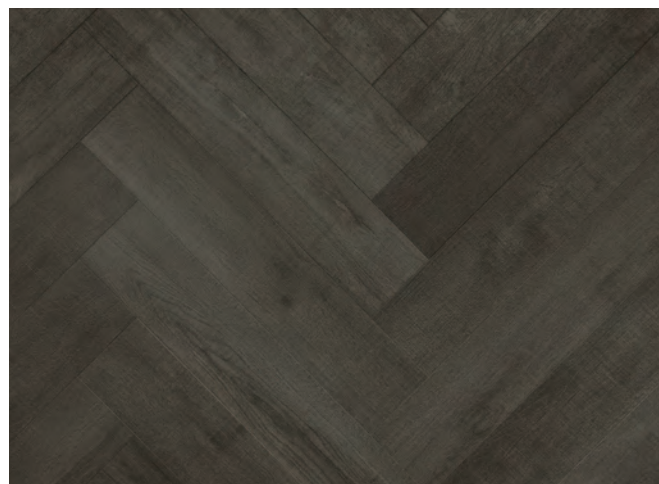


NIK8725




NIK154261

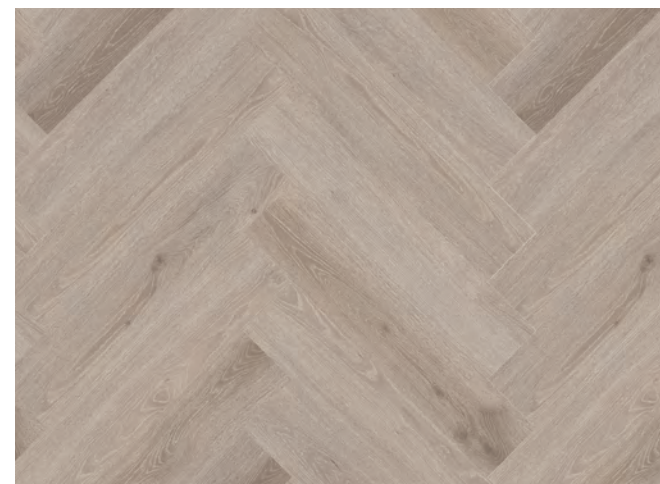


NIK154262

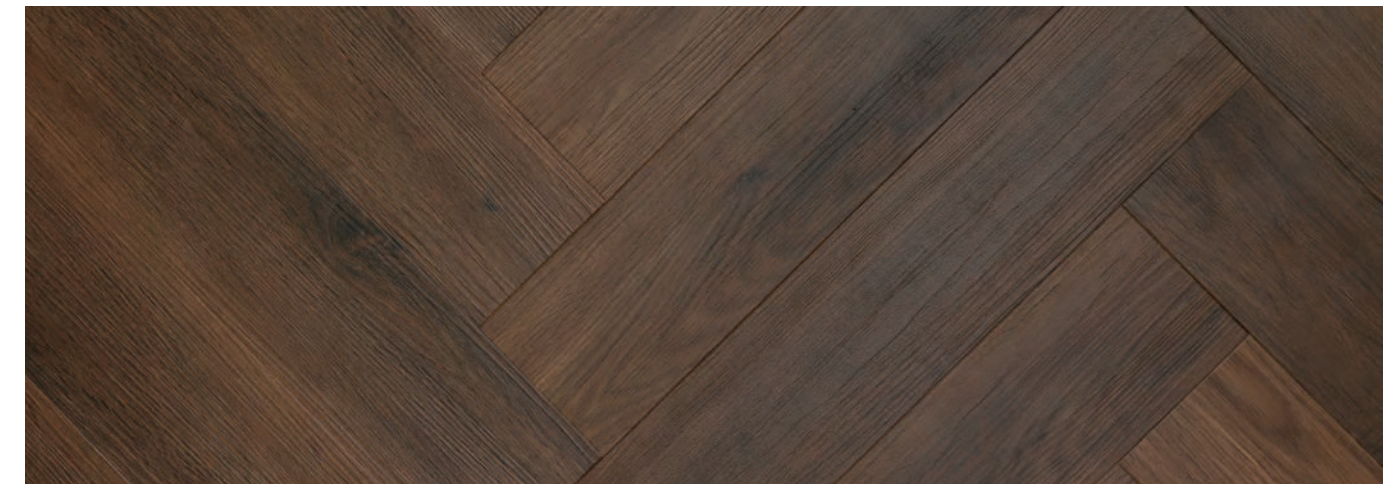

NIK15399

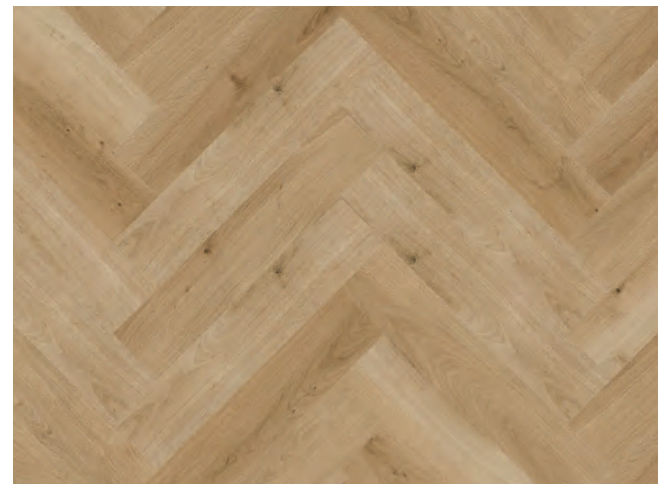

NIK15185

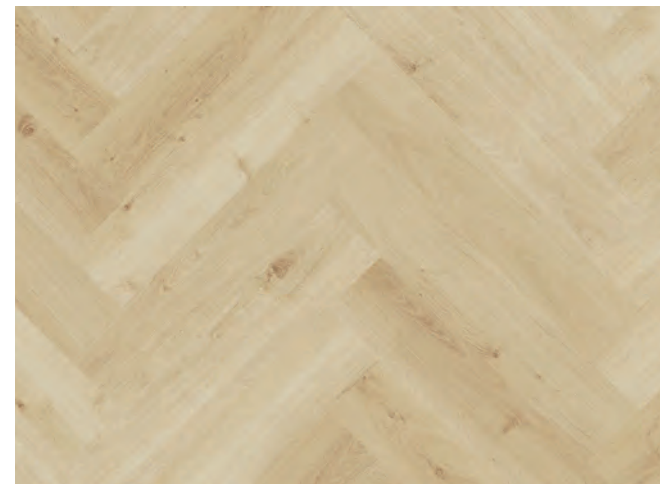

NIK15327



AVAILABLE EMBOSS COLLECTION

According to different styles based on wood designs and stone designs ,Kingdom gives various embossing recommendations to match the design, and ensure the best aesthetic feeling created by embossing.



Concrete




Leather




OrangePeel



Sandy

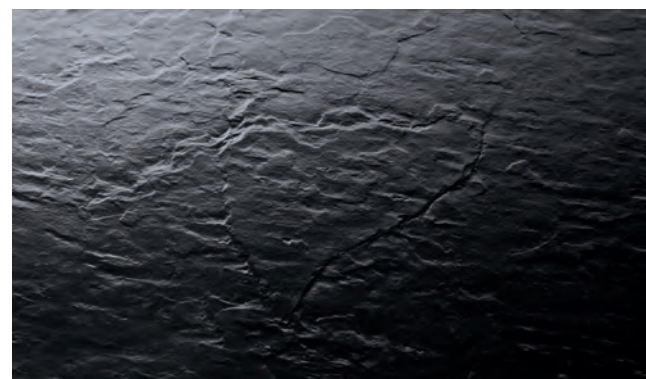


Shale

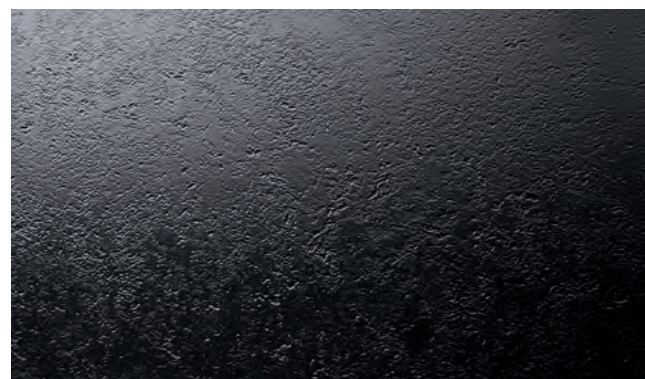

Travertine




BP-R

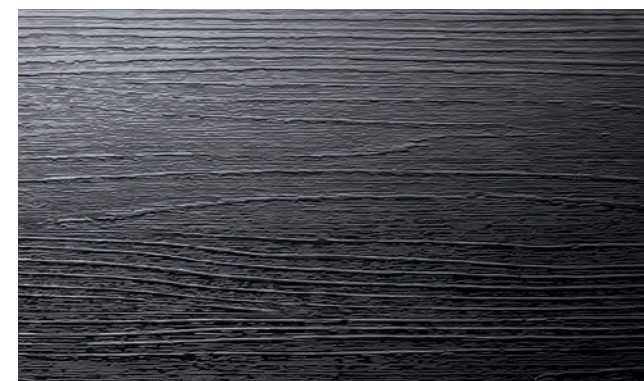

BP-S




Handscraped-A

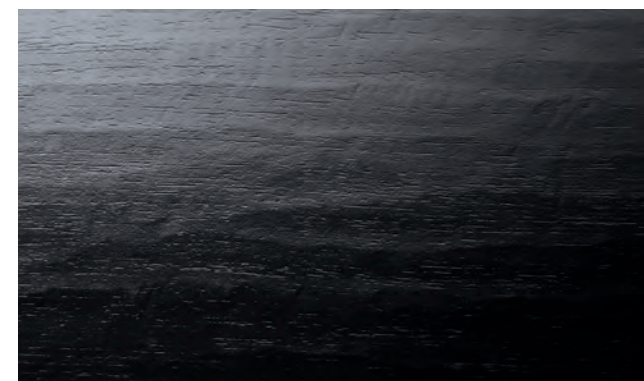

Handscraped-B



Registered

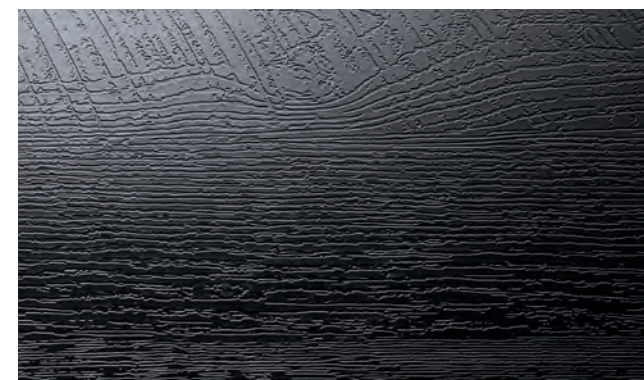

SawCut



WI



WoodTick

Stone

Wood

